

DRIVER™

INDUSTRIAL SAFETY

SAFETY IS ALL WE DO™



2024 Safety & Industrial Products

www.DriverIndustrialSafety.com

DRIVER™

INDUSTRIAL SAFETY

SAFETY IS ALL WE DO™

OUR MISSION

To create and innovate dependable safety products for industrial applications. Our portfolio of brands help identify and safely secure vehicles and assets, protecting the people who work alongside them. We proudly manufacture our safety products in the USA for the harshest environments in the WORLD.

OUR PURPOSE

At Driver Industrial Safety™, SAFETY IS ALL WE DO™. Our passion is to solve the critical need for well-engineered and dependable products for worksite safety. To ensure the best solutions, our innovation is driven by global partnerships and field tested in the world's harshest working conditions.

Meet Our Brands

NEW!



Cable Protectors and Ground Protection Mats



Hi-Visibility, Heavy Equipment Vehicle Identification Displays



General Purpose & Heavy Equipment Heavy Duty Wheel Chocks



Warning Whip Solutions, Whip Lights & Safety Accessories



Heavy Duty LED Warning Lights: Beacons & Warning Light Accessories



Safety Industrial Labeling & Fleet Identification




SAFETY IS ALL WE DO™

Driver Industrial Safety™ is a quality manufacturer of market-driven industrial Safety Products for industrial and commercial industries. We are a privately owned and operated company headquartered in Phoenix, Arizona, U.S.A. With manufacturing and warehouse facilities in the US and Canada, we sell through our global distribution channels. Driver Industrial Safety™ was originally founded in 2004, under our former recognized name SafetyWhips®.

Our 6 branded product lines lead the industry in robust quality and engineering: RhinoGuard™ Cable Protectors and Ground Protection Mats, NVIZN Identification Displays®, SafetyWhips® Warning Whips, Helios Warning Lights®, Toro® Heavy Duty Wheel Chocks, and Industrial Decals Co.™ & OEM Graphics.

Our company was founded on the basis that there is a critical need for well engineered and dependable products for work site safety. Clients have come to Depend on Driver to keep their worksite safe. Our combined 100+ years in combined LED and electronics manufacturing provides the best engineered products available for worksite safety. While Driver Industrial Safety™ products have been poorly copied, we are still unmatched in performance and durability.

Markets Served

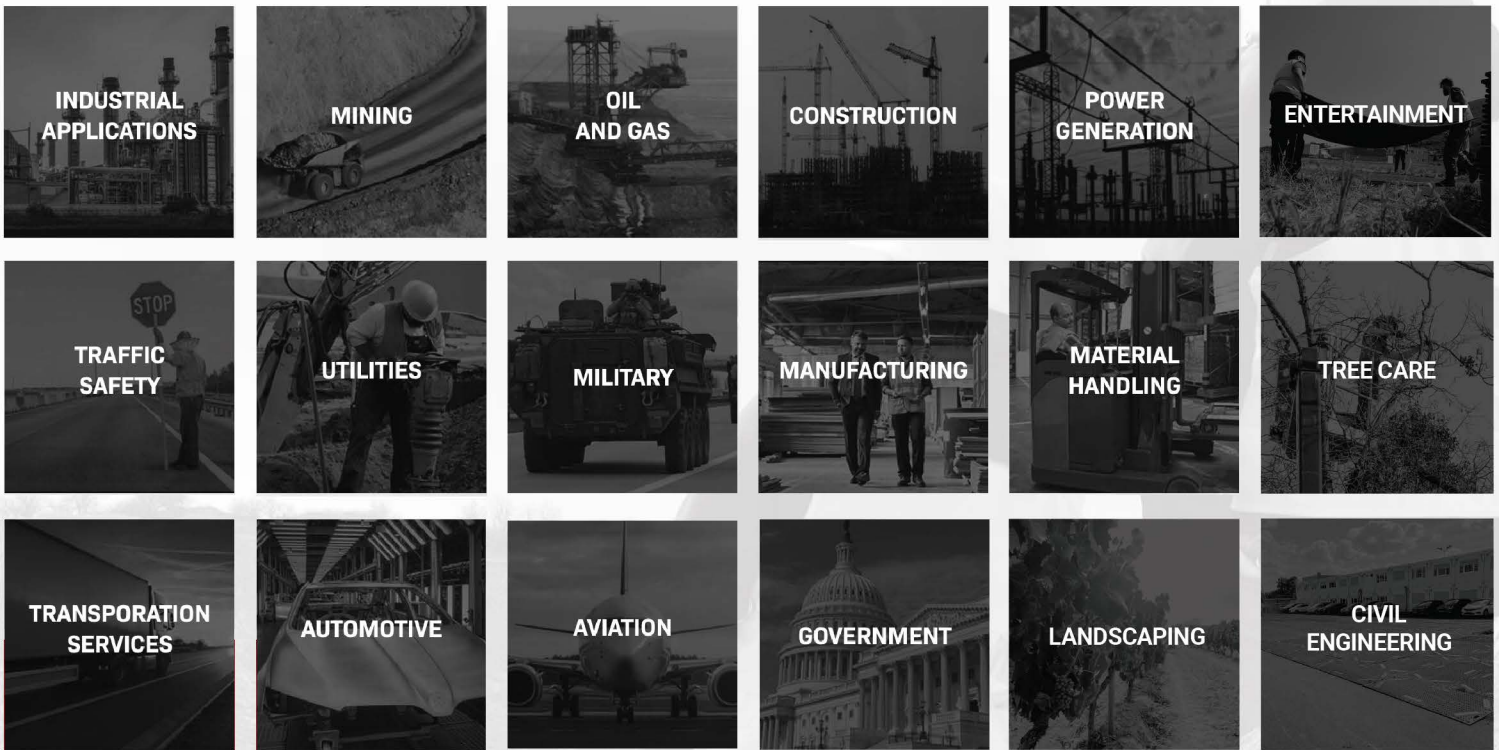

Driver Industrial Safety™ is a Member of and Proudly Supports



TABLE OF CONTENTS



DRIVER INDUSTRIAL SAFETY

About Driver Industrial Safety™	2
Table of Contents	4
Jobsite Access Options	5



RHINO GUARD™

RHINO GUARD CABLE PROTECTORS & GROUND PROTECTION MATS

Cable Protectors	7
Ground Protection Mats	8



VEHICLE IDENTIFICATION DISPLAYS

LED Programmable Displays 9", 12", 16"	10
LED Programmable Displays 18", 27", 36"	11
Payload, Message Board & Signal Light Displays	
LED Reflective Backlit Displays 9", 12", 16", 18", 24", 36", 56"	12
Featured LED Displays & Accessories Interchangeable Characters, 3-Sided, and Mounting Brackets & Accessories	13
Universal Platform Mounting Systems	14



HEAVY DUTY WHEEL CHOCKS

Heavy Duty Wheel Chocks	16
Wheel Chock Accessories Mounting Brackets, Rubber & Aluminum Cleats	17
General Purpose & Aviation 15 Ton, 20 Ton, 25 Ton, 35 Ton	18
Heavy Equipment 40 Ton, 70 Ton, 75 Ton, 165 Ton, 255 Ton, 400 Ton	19



HEAVY DUTY LED BEACONS

X-MOD Series Heavy Duty LED Beacons	21
X-MOD Series: Single & Dual Color Permanent Mount, Magnet Mount, Pipe Mount	22
X-MOD Parts & Accessories Modular Replacement Parts, Mounting Options, and Conversion Kits	23




WARNING WHIPS & SAFETY SOLUTIONS

Light Duty Fiberglass Warning Whips Non-Powered	25
Heavy Duty Fiberglass Warning Whips Threaded Hex (Non-Powered)	26
Heavy Duty Fiberglass Warning Whips Threaded Hex (Powered)	27
Heavy Duty Fiberglass Warning Whips Quick Disconnect (Non-Powered)	28
Heavy Duty Fiberglass Warning Whips Quick Disconnect (Powered)	29
Telescoping Warning Whips Non-Powered & Powered	30
Super Duty All Weather™ Warning Whips Threaded Hex (Powered)	31
Super Duty LED Warning Whips	32
Super Duty LED Warning Whips Dual Color, 12' Whip & WSSM Mount	33
Warning Whip LED Lights SC Series: Single & Dual Color	34
Heavy Duty Safety Flags	35
Warning Whip Bases & Adapters Threaded Hex, Spring Mounts & Quick Disconnect	36
Warning Whip Mounts Permanent & Temporary	37
Warning Whip Hitch Mounts Standard & Extended	38
Accessories / Personal & Traffic Safety Whip Replacement Parts First Aid Clean-up Kits Fire Extinguishers Industrial Traffic Safety	39



JOBSITE ACCESS OPTIONS

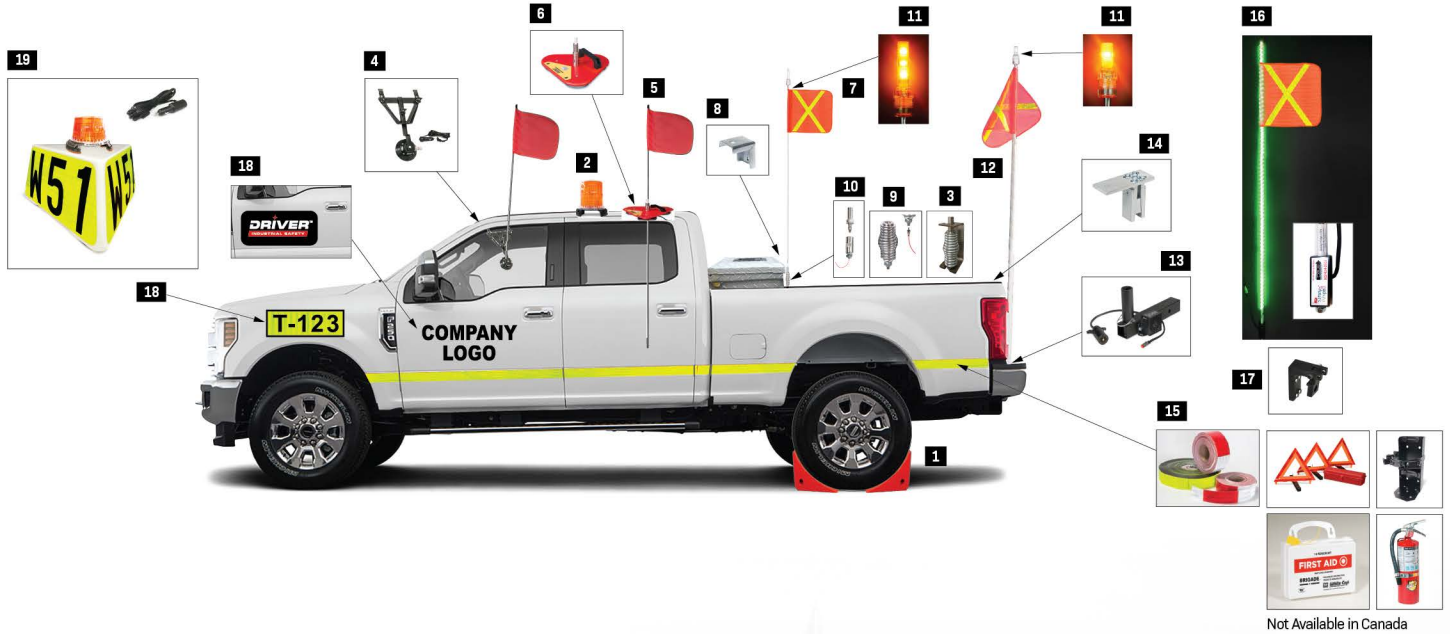

Not Available in Canada

PRODUCT	PART #	BRAND	OPTIONS / ADDITIONAL INFORMATION
1 General Purpose Wheel Chocks	WC-U0400	TORO® Chocks	Models for Max. GVWs of 15 Ton (30,000 lbs/13,607.8 kg) to 40 Ton (80,000 lbs/36,287.4 kg).
2 X-MOD Series - Heavy Duty LED Beacons	HE-XB-HPA-W	Helios Warning Lights	Single and Dual Colors, Short and High Profile options and with fully replaceable parts.
3 Whip Stabilizer Spring Mount	SDL-WSSM-KIT	SafetyWhips®	For 10-12 ft SafetyWhips Models (recommended for 8' Whip Models) to support the wind resistance.
4 Heavy Duty Window Mount	519.320-V	SafetyWhips®	For Powered, Light Duty Whips up to 8 ft - includes Cigarette Cord (519.320NP-V for NP whips).
5 Light Duty Warning Whips	ATV308-3-M	SafetyWhips®	3 ft, (5/16") Non-powered "All Weather" Fiberglass Whips with Threaded Base (3/8" rods available).
6 Medium Duty Magnet Mounts	519.33LHR	SafetyWhips®	Mounting solution for Powered Whips up to 8 ft with Threaded & Quick Disconnect options.
7 Super Duty Warning Whips	SD05-X-30B-SC4CA	SafetyWhips®	5 ft, Powered "All Weather" Whip, 16" Reflective "X" Flag, Heavy Duty Spring and Bright LED Light.
8 Heavy Duty Angle Bracket Mount	ABM	SafetyWhips®	Permanent mounting solution for use with Threaded or Quick Disconnect whip base mounts.
9 Heavy Duty Spring Mounts - Powered	519.30B	SafetyWhips®	Heavy Duty Springs to help reduce whip breakage, prolonging your Safety Whip life.
10 Quick Disconnect Whip KIT - Powered	SWQD-KIT-PT	SafetyWhips®	Includes Powered Whip Adapter and Powered Quick Disconnect Base with Pig Tail power lead.
11 SC4 Series / SC3 Series LED Whip Lights	SC4-CA / SC3-A	SafetyWhips®	SC4 - High profile, Bright LEDs (flashing or non-flashing) / SC3 - Low profile, Super Bright LEDs.
12 Heavy Duty Telescoping Warning Whips	TW13D-X	SafetyWhips®	13 ft, Powered "Adjustable" Fiberglass Whips - Collapsible & Extendable with 3 Locking Sections.
13 Hitch Mount for Telescoping Whips - Powered	HMTDA	SafetyWhips®	Mounting solution powered via External Waterproof Connector (non-powered options available).
14 Heavy Duty Aluminum Stake Pocket Mount	SPM	SafetyWhips®	Universal fit with wedge application for both Threaded and Disconnect Whips.
15 Industrial Traffic & Personal Safety Products *	VARIES	SafetyWhips®	3M Conspicuity Tape, Road Hazard Kits, First Aid Kits, Fire Extinguishers and Mounting Brackets.
16 Super Duty LED Warning Whips	SDL06G-XY	SafetyWhips®	The Toughest "All Weather" Whip with pressure vent protection. Full top to bottom LED lighting.
17 Heavy Duty Fold Down Mount	FDM	SafetyWhips®	Heavy Duty Aluminum mounting solution to attach whips to tool box or back rack. Pull pin to fold down.
18 Industrial Vehicle Identification Fleet Decals	VARIES	Industrial Decals Co.™	Industrial Grade Fleet Decals & Fleet Management, Vehicle Magnetics, Safety Labels, Fire Tags.
19 Light Duty, 3-Sided LED Backlit ID Display	VID-SA	NVIZN™ Identification Displays	For pickup trucks/passenger vehicles - Reflective backing with Unit # and (3) Heavy Duty Magnetic feet.

* Industrial Traffic & Personal Safety Products - Not Available in Canada

We Provide **Safety Driven Solutions**, Wherever You Are.



Meet Our Brand

RHINO GUARD[™]

CABLE PROTECTORS & GROUND PROTECTION MATS

CABLE PROTECTORS

- ➔ 25% Lighter Due to Advanced Reaction Injection Molding (RIM)
- ➔ Improved Functional Design with Snap On/Off Lid.
- ➔ Custom Colors and Logos Available Allowing for Personalization.
- ➔ Manufactured in the USA.

GROUND PROTECTION MATS

- ➔ Offers General Purpose and Heavy Duty Mat Options.
- ➔ Configurable Applications with Connectors.
- ➔ Chemical, Oil, and UV Resistant.
- ➔ Dual Traction Surfaces.



RhinoGuard™ Cable Protectors




Advanced Reaction Injection Molding (RIM) ▪ 25% Lighter in Weight ▪ Snap On/Off Lid ▪ Customer Colors/Logos!

NEW!

5-Channel Cable Protector


Introducing the **RhinoGuard™** 5-Channel Cable Protector: Built on decades of experience, expertise, and knowledge of what it takes to manufacture the best product in the market. Our cutting-edge manufacturing process means superior advantages over other cast-molded products. RhinoGuard™ is ideal for use in the Entertainment, Temp Power, O&G, Utility, Construction, and Industrial markets.

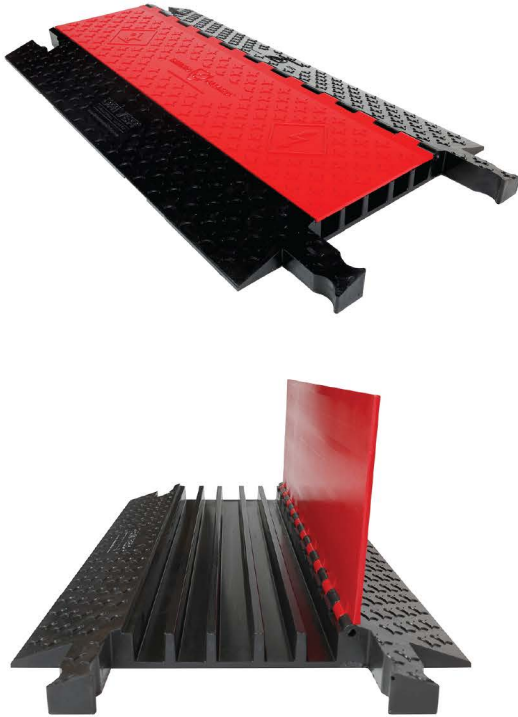

STANDARD LID OPTIONS

- RG513A-RB**
Red Lid/Black Base
- RG513A-BB**
Red Lid/Black Base

Benefits

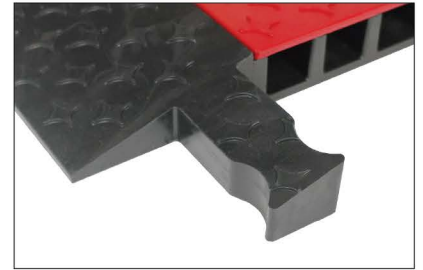

Easier to connect and disconnect compared to cast molding. No sharp edges.



Snap on/off lid for easy field lid swapping, no fiberglass rods required. Made with the most popular connector, compatible with other brands.




Protects cables/hoses up to 1.3" outside diameter, with a center channel accommodating up to 1.6" outside diameter.



Diamond tread pattern designed for improved traction.

Specifications

Product Attribute	Product Description
Model Numbers	RG513A-RB, RG513A-BB
Load Capacity Per Axle (lbs)	30,000
Load Capacity Per Tire (lbs)	15,000
Length (Inches)	36.0
Width (Inches)	19.8
Height (Inches)	2.0
Weight (lbs)	21.0
Max Cable Outside Diameter (Inches)	1.32, 1.6 (Center Channel)
Number of Channels	5

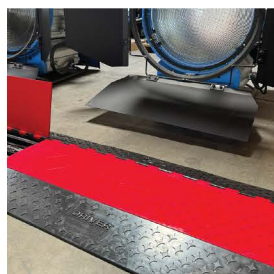

RhinoGuard™ Ground Protection Mats

Easy Installation and Configurable ▪ Two Tread Patterns ▪ Portable Matting System




NEW!

General Purpose Ground Protection Mat

Introducing the **RhinoGuard™** General Purpose Ground Protection Mats: the NEW durable, general purpose mat is strong enough to move vehicles and equipment across, yet man-handlable for quick and easy installation. Stronger and sturdier than plywood, without rotting, becoming water logged, warped, or splintered from weather exposure. Perfect solution for temporary vehicle roadways in muddy or soft ground conditions, protecting delicate sports turf or lawn from damage, or a pedestrian walkway at construction sites, or events. Ideal for the utility, construction, landscape, oil and gas, mining, and event industries.

Two Surface
Traction Design

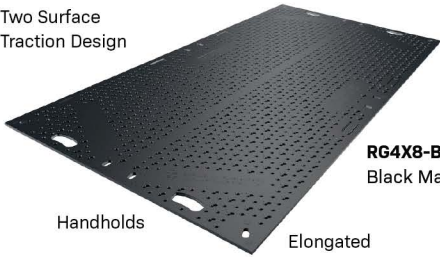

RG4X8-B
Black Mat

Handholds

Elongated
Connection Holes



Connector Holes
12 connection holes providing options for installation configuration (M10 flange head bolts included)

Benefits



Connectors Available
2-Way (RGC-2WAY)
4-Way (RGC-4WAY)



Two excellent traction surfaces for safe movement of vehicles and pedestrians.

Specifications

Product Attribute	Product Description
Model Number	RG4X8-B
Color	Black
Pallet Quantity	40
Load Bearing Capacity (Tons)	120
Length (Feet)	8.0' (2410 mm)
Width (Feet)	4.0' (1200 mm)
Thickness (Inches)	0.8" (20 mm), 0.5" (12 mm) Core
Weight (lbs)	79.4 lbs (36 kg)



Elongated connection holes with 2-Way and 4-Way connectors with unique hole design for adjustments.



Four hand cut-outs and grips for easy handling and safe lifting.

NEW!

Heavy Duty Ground Protection Mat

Introducing the **RhinoGuard™** Heavy Duty Ground Protection Mats: a NEW proven standard in highly portable, yet heavy duty matting solution. Thicker, stronger modular system with built-in connectors offers maximum support for any vehicle. This heavy-duty solution is the most durable and functional portable matting system for temporary access and is ideal for creating access roads, walkways, pavement protection, event flooring, parking lots, and job site compounds. The heavy-duty mat is typically used by construction sites, utilities and infrastructure, geotechnical, military, civil engineering, logistics, and rental industries.

Two-Sided
Tread Patterns



RG6X3-HD-B
Black Mat

Built-in
Connectors

Overlapping
Lipped Connectors



Benefits



Thicker, stronger modular system with built in connectors.



Two tread patterns offer superior grip in all directions.

Specifications

Product Attribute	Product Description
Model Number	RG6X3-HD-B
Color	Black
Pallet Quantity	25
Load Bearing Capacity (Tons)	130
Length (Feet)	6.0' (1829 mm)
Width (Feet)	3.0' (914 mm)
Thickness (Inches)	1.0" (25 mm)
Weight	88 lbs (40 kg)



Overlapping lipped connectors offer maximum support and mud suppression.



Easily handled by two workers without lifting equipment, at 88 lbs. per mat.



Meet Our Brand

NVIZN®

IDENTIFICATION DISPLAYS

- ➔ #1 Brand Choice for Leading Mine Sites
- ➔ Globally Recognized for LED Identification Displays
- ➔ Supporting Standard Vehicles & Heavy Equipment
- ➔ Engineered with Advanced LED Technology
- ➔ Lowest Power Consumption in the Industry
- ➔ Lightweight & Easy to Install
- ➔ Maintenance Free
- ➔ Manufactured in the USA

22

81

80

03

661

DT11

504

LED Programmable Vehicle Identification Displays



Bright & Rugged LED Displays ▪ **Most Dependable in the Industry** ▪ **Maintenance Free** ▪ **Field Tested for Over 20 Years!**



12", VID-3N12L-G shown above

NVIZN™ LED Programmable Displays are the most efficient form of LED displays Driver Industrial Safety™ has to offer. Recognized globally for dependability, high visibility, and programmable functionality. LED Programmable displays provide the most robust and efficient solution to identify any vehicle or heavy equipment especially under extreme, low visibility weather conditions. NVIZN™ products have proven to be the most visible enabling continuous Day and Night operation on countless mine sites with the luxury of no maintenance. We offer up to (5) characters within our Single-Framed displays for users to efficiently program multiple numbers, letters, or characters and/or messages for required equipment identification. Determine your Mounting and Distance Criteria™ (DC) requirements to ensure you select the right Type, Size or a Combination of displays to safeguard workers and site management so they are easily able to identify unit number, unit status, speed limit, payload weight, or otherwise, from afar. Count on Driver Industrial Safety™ to protect your valued Personnel & Assets!

9" Numeric Displays, Programmable 0 to 9

Visible up to 350ft / 107m		3 Digit, LED Programmable							Voltage from 10 to 30 VDC!		
Part Number	LED Color	Digits	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts		
VID-3N9-R	Red	3	228.6 mm 9 in	4.9 kg 11 lbs	346.7 mm 13.65 in	438.15 mm 17.25 in	24	0.50	12		
VID-3N9-A	Amber										
VID-3N9-G	Green										
VID-3N9-B	Blue										
Accessories	Mounting Brackets	Power Extension Cord	Power Cord Splitter 2 VIDs	Power Cord Splitter 3 VIDs							
	VID-S9-2	VID-PC-EXT-50-1	VID-PC-EXT9-2Y	VID-PC-EXT9-3Y							

12" Numeric Displays, Programmable 0 to 9

Visible up to 500ft / 152m		2-4 Digits Available, LED Programmable							Voltage from 10 to 30 VDC!		
Part Number	LED Color	Digits	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts		
VID-2N12L-R	Red	2	304 mm 12 in	7 kg 15.5 lbs	438.15 mm 17.25 in	498.10 mm 19.61 in	24	0.33	8		
VID-2N12L-A	Amber										
VID-2N12L-G	Green										
VID-2N12L-B	Blue										
VID-3N12L-R	Red	3	304 mm 12 in	9.3 kg 20.5 lbs	438.15 mm 17.25 in	710.95 mm 28.02 in	24	0.49	12		
VID-3N12L-A	Amber										
VID-3N12L-G	Green										
VID-3N12L-B	Blue										
VID-4N12L-R	Red	4	304 mm 12 in	11.2 kg 24.8 lbs	438.15 mm 17.25 in	923.80 mm 36.37 in	24	0.66	16		
VID-4N12L-A	Amber										
VID-4N12L-G	Green										
VID-4N12L-B	Blue										
Accessories	Mounting Brackets	Power Extension Cord	Power Cord Splitter 2 VIDs	Power Cord Splitter 3 VIDs							
	VID-S12-2	VID-PC-EXT-50-1	VID-PC-EXT12-2Y	VID-PC-EXT12-3Y							

12" Character Displays, Programmable A to Z and 0 to 9

Visible up to 500ft / 152m		1 to 5 Characters Available, LED Programmable							Voltage from 10 to 30 VDC!		
Part Number	LED Color	Characters	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts		
VID-2C12-R	Red	2	304 mm 12 in	10.4 kg 23 lbs	438.15 mm 17.25 in	622.05 mm 24.49 in	24	1.00	24		
VID-2C12-A	Amber										
VID-2C12-G	Green										
VID-2C12-B	Blue										
Accessories	Mounting Brackets	Power Extension Cord	Power Cord Splitter 2 VIDs	Power Cord Splitter 3 VIDs							
	VID-S12-2	VID-PC-EXT-50-1	VID-PC-EXT12-2Y	VID-PC-EXT12-3Y							

NEW! 16" Numeric Displays, Programmable 0 to 9

Visible up to 1000ft / 305m		2 or 3 Digits Available, LED Programmable							Voltage from 10 to 30 VDC!		
Part Number	LED Color	Characters	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts		
VID-3N16-R	Red	3	406 mm 16 in	11.3 kg 25 lbs	539.8 mm 21.25 in	895.4 mm 35.25 in	24	0.57	13.7		
VID-3N16-A	Amber										
VID-3N16-G	Green										
Accessories	Mounting Brackets	Power Extension Cord	Power Cord Splitter 2 VIDs	Power Cord Splitter 3 VIDs							
	VID-S12-2	VID-PC-EXT-50-1	VID-PC-EXT12-2Y	VID-PC-EXT12-3Y							

NEW!

16" NUMERIC DISPLAYS VISIBLE UP TO 1000FT!



Lightweight & Easy to Install!



Multiple LED Color Options Available!



VID-3N9-A



VID-2N12L-G



VID-3N12L-R



VID-4N12L-G



VID-5C12-A

18" Character Displays, Programmable A to Z and 0 to 9

Visible up to 1000ft / 300m							Voltage from 10 to 30 VDC!		
Part Number	LED Color	1 Character, LED Programmable							
Character	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts		
VID-1C18-R	Red	1	457.2 mm 18 in	7.3 kg 16 lbs	575.31 mm 22.65 in	438.15 mm 17.25 in	24	1.00	24
VID-1C18-A	Amber								
VID-1C18-G	Green								
VID-1C18-B	Blue								
Accessories	Mounting Brackets	Power Extension Cord	Power Cord Splitter 2 VIDs	Power Cord Splitter 3 VIDs					
	VID-S18-2	VID-PC-EXT-50-1	VID-PC-EXT18/24-2Y	VID-PC-EXT18/24-3Y					




27" Character Displays, Programmable A to Z and 0 to 9

Visible up to 1500ft / 457m							Voltage from 10 to 30 VDC!		
Part Number	LED Color	1 Character, LED Programmable							
Character	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts		
VID-1C24-R	Red	1	609.6 mm 27 in	9.5 kg 21 lbs	803.91 mm 31.65 in	438.15 mm 17.25 in	24	1.50	36
VID-1C24-A	Amber								
VID-1C24-G	Green								
VID-1C24-B	Blue								
Accessories	Mounting Brackets	Power Extension Cord	Power Cord Splitter 2 VIDs	Power Cord Splitter 3 VIDs					
	VID-S24-2	VID-PC-EXT-50-1	VID-PC-EXT18/24-2Y	VID-PC-EXT18/24-3Y					

36" Character Displays, Programmable A to Z and 0 to 9

Visible up to 2000ft / 610m							Voltage from 10 to 30 VDC!		
Part Number	LED Color	1 Character, LED Programmable							
Character	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts		
VID-1C36-R	Red	1	914.4 mm 36 in	12.2 kg 27 lbs	1032.51 mm 40.65 in	438.15 mm 17.25 in	24	2.50	60
VID-1C36-A	Amber								
VID-1C36-G	Green								
VID-1C36-B	Blue								
Accessories	Mounting Brackets	Power Extension Cord	Power Cord Splitter 2 VIDs	Power Cord Splitter 3 VIDs					
	VID-S36-2	VID-PC-EXT-50-1	VID-PC-EXT36-2Y	VID-PC-EXT36-3Y					

VISIBLE UP TO 2000ft/610m!

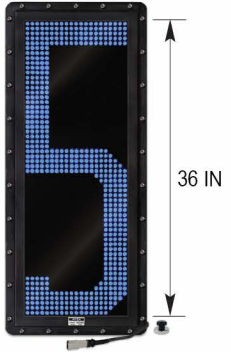

For Display Accessories (Refer to Page 13)

A B G R Multiple LED Color Options Available!

Payload Displays

Assists both Digger and Loader Operators! Displays are mounted to the Haul Truck, in view of operator, displaying "Real Time" Payload weights as materials are being loaded onto a Dump Truck.

NEW!



VID-PYLD-R
with remote
(VID-PYLD-Communication Module)

Additional Features:
Displays Vehicle's Speedometer, Truck #, and Flashes when Truck is overloaded



IP RATED
IP66/IP67

VISIBLE UP TO 500ft/152m!

A B G R : Multiple LED Color Options Available!

LED Message Board Displays

Identifies Equipment that is Down or Needs Assistance

LED Message Board Displays exceed expectations with their advanced communication capabilities. These smart displays seamlessly connect to your software, device, or vehicle, enabling features like payload display for shovel operators, vehicle speed limits, low battery alerts, truck wash bay signals, and more. Pre-programmed to show equipment status, traffic guidance arrows, and various communication needs.

- ▶ Custom Programming
- ▶ Sealed System Display for Protection
- ▶ Real-Time Programming Capability

- ▶ External Waterproof Pigtail
- ▶ Message Vehicle Number Lock
- ▶ Easy Touch-Screen Controls



VID-3C12-MBCA-A-KIT
(with remote)

Up to 3 Characters - 17.25"H (438.15mm) x 35.25"L (895.35mm)
12V to 24V | 25.5lbs (11.6kg) | 36 Watts

A B G R : Multiple LED Color Options Available!



VID-3C12-MBCA-A
(without remote)



VID-M3XCR
(Also Sold Separately)

VISIBLE UP TO 500ft/152m!

IP RATED
IP66/IP67

LED Signal Light Displays: Advanced LED Backlit Technology

NEW!



VID-BL3SIG6-RAG
(without remote)



VID-BLSIG6-24V-R/B-KIT
(with remote, not pictured)



VID-BL3SIG6-RAG-KIT
(with remote)



VID-BL2SIG6-RG-KIT
(with remote)

Signal Light displays serve as signaling devices for various operational modes and directional guidance. They use color signals like "Red Light, Green Light" to indicate equipment use, vehicle direction, or personnel movement. These lights help manage site traffic, show forward and reverse modes, or denote autonomous vs. manual operation, ensuring clear communication and safety on site.

- ▶ Available in 110V & 220V upon request (refer to factory for wire hirseness)
- ▶ Operating Temperatures ranging from 50°C (-58°F) to +60°C (140°F)
- ▶ Dimensions: 11"H (279.40mm) x 35.37"L (898.40mm)
- ▶ 12V (1.20Amps) to 24V (.60Amps) | 15lbs (6.80kg) | 14.40 Watts



IP RATED
IP66/IP67

VISIBLE UP TO 2000ft/610m!

A B W G R : 2 or 3 Color Combinations Available!

LED Reflective Backlit Vehicle Identification Displays



Bright & Rugged LED Displays ▪ **Most Dependable in the Industry** ▪ **Maintenance Free** ▪ **Field Tested for Over 20 Years!**

LED Reflective Backlit Displays are a solid solution for 24hr Equipment Visibility. NVIZN™ Backlit Displays are rugged, super-sealed and engineered with customizable 3M™ Diamond Grade™ reflective Unit Numbers or Message to ensure maximum visibility both day and night whether your vehicle (and display) are powered on or off. Depend on Driver Industrial Safety's NVIZN™ products for reliable equipment management solutions!

DESIGNED FOR 24 HOUR USE!



Multiple Reflective Color Options Available!

9" Character - Visible up to 350ft / 107m

Part Number LED Color		2 to 4 Character, LED Reflective Backlit				12 Volt Available Upon Request			
		Characters	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-BL3C9-24V-BKA	Amber	2 to 4	228.8 mm	4.90 kg	346.70 mm	438.15 mm	24	0.50	12
VID-BL3C9-24V-BKY	Yellow Green		9 in	11 lbs	13.65 in	17.25 in			
VID-BL3C9-24V-BKW	White								
Accessories	Mounting Brackets	Power Extension Cord	Power Cord Splitter 2 VIDs		Power Cord Splitter 3 VIDs				
	VID-S9-2	VID-PC-EXT-50-1	VID-PC-EXT9-2Y		VID-PC-EXT9-3Y				



VID-BL1C18-24V-BKA
(3) Single Frames -18" Fluorescent Amber Reflective Characters

12" Character - Visible up to 500ft / 152m

Part Number LED Color		2 to 4 Character, LED Reflective Backlit				12 Volt Available Upon Request			
		Characters	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-BL3C12-24V-BKA	Amber	2 to 4	304.0 mm	11.34 kg	346.70 mm	654.05 mm	24	3.75	90
VID-BL3C12-24V-BKY	Yellow Green		12 in	25 lbs	13.65 in	25.75 in			
VID-BL3C12-24V-BKW	White								
Accessories	Mounting Brackets	Power Extension Cord	Power Cord Splitter 2 VIDs		Power Cord Splitter 3 VIDs				
	VID-S12-2	VID-PC-EXT-50-1	VID-PC-EXT12-2Y		VID-PC-EXT12-3Y				

VISIBLE UP TO 2000ft/610m!

For Display Accessories (Refer to Page 13)

16" Character - Visible up to 750ft / 230m

Part Number LED Color		2 to 4 Character, LED Reflective Backlit				12 Volt Available Upon Request			
		Characters	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-BL3C16-24V-BKA	Amber	2 to 4	406.4 mm	16.33 kg	539.75 mm	895.35 mm	24	5.63	135
VID-BL3C16-24V-BKY	Yellow Green		16 in	36 lbs	21.25 in	35.25 in			
VID-BL3C16-24V-BKW	White								
Accessories	Mounting Brackets	Power Extension Cord	Power Cord Splitter 2 VIDs		Power Cord Splitter 3 VIDs				
	VID-S16-2	VID-PC-EXT-50-1	VID-PC-EXT16-2Y		VID-PC-EXT16-3Y				

VID-BL3C12-24V-BKA
Reflective Fluorescent Amber Characters



18" Character - Visible up to 1000ft / 300m

Part Number LED Color		1 Character, LED Reflective Backlit				12 Volt Available Upon Request			
		Characters	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-BL1C18-24V-BKA	Amber	1	457.20 mm	7.30 kg	575.31 mm	438.15 mm	24	1.00	24
VID-BL1C18-24V-BKY	Yellow Green		18 in	16 lbs	22.65 in	17.25 in			
VID-BL1C18-24V-BKW	White								
Accessories	Mounting Brackets	Power Extension Cord	Power Cord Splitter 2 VIDs		Power Cord Splitter 3 VIDs				
	VID-S18-2	VID-PC-EXT-50-1	VID-PC-EXT18-2Y		VID-PC-EXT18-3Y				



VID-BL3C16-24V-BKY
Reflective Fluorescent Yellow Green Characters

27" Character - Visible up to 1500ft / 457m

Part Number LED Color		1 Character, LED Reflective Backlit				12 Volt Available Upon Request			
		Characters	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-BL1C24-24V-BKA	Amber	1	685.80 mm	9.50 kg	803.91 mm	438.15 mm	24	1.50	36
VID-BL1C24-24V-BKY	Yellow Green		27 in	21 lbs	31.65 in	17.25 in			
VID-BL1C24-24V-BKW	White								
Accessories	Mounting Brackets	Power Extension Cord	Power Cord Splitter 2 VIDs		Power Cord Splitter 3 VIDs				
	VID-S24-2	VID-PC-EXT-50-1	VID-PC-EXT24-2Y		VID-PC-EXT24-3Y				



VID-BL1C18-24V-BKA
Reflective Fluorescent Amber Character

36" Character - Visible up to 2000ft / 610m

Part Number LED Color		1 Character, LED Reflective Backlit				12 Volt Available Upon Request			
		Characters	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-BL1C36-24V-BKA	Amber	1	914.40 mm	12.70 kg	1032.51 mm	438.15 mm	24	4.17	100
VID-BL1C36-24V-BKY	Yellow Green		36 in	28 lbs	40.65 in	17.25 in			
VID-BL1C36-24V-BKW	White								
Accessories	Mounting Brackets	Power Extension Cord	Power Cord Splitter 2 VIDs		Power Cord Splitter 3 VIDs				
	VID-S36-2	VID-PC-EXT-50-1	VID-PC-EXT36-2Y		VID-PC-EXT36-3Y				



VID-BL1C24-24V-BKY
Reflective Fluorescent Yellow Green Character

NEW! 56" Character - Visible up to 2500ft / 762m

Part Number LED Color		1 Character, LED Reflective Backlit				12 Volt Available Upon Request			
		Characters	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-BL1C56-24V-BKA	Amber	1	1422.4 mm	24.50 kg	1541.80 mm	439.40 mm	24	6.38	153
VID-BL1C56-24V-BKY	Yellow Green		56 in	54 lbs	60.70 in	17.30 in			
VID-BL1C56-24V-BKW	White								
Accessories	Mounting Brackets	Power Extension Cord	Power Cord Splitter 2 VIDs		Power Cord Splitter 3 VIDs				
	VID-S36-2	VID-PC-EXT-50-1	VID-PC-EXT56-2Y		VID-PC-EXT56-3Y				

NEW!
VID-BL1C56-24V-BKA
Reflective Fluorescent Amber Character

IP RATED
IP66/IP67



12" & 16" INTERCHANGEABLE DISPLAYS!
LED Reflective Backlit Displays - same build as our standard displays, constructed with the same super-sealed frame!
(For Product Details, Refer to Page 13)

Featured NVIZN™ Products: Custom Identification Displays

Bright & Rugged LED Displays ▪ **A** **Y** **W** Various 3M™ Reflective Color Options ▪ Easy to Install & Maintenance Free!



Interchangeable Character Reflective Backlits

5 YEAR LIMITED WARRANTY



VID-BLE3C16-BKY
(with Fluorescent Yellow Green Characters)

16"

Purchase Your Custom Number Kit TODAY!

*Combination Letter Kits Available Upon Request



All Parts are Interchangeable & Easy to Install!

- ▶ 2 to 4 Character 16" LED, Reflective Backlit
- ▶ 2 to 4 Positions for Interchangeable Characters
- ▶ Advanced Backlit Technology for Max Visibility
 - ▶ Advanced Temperature Control LEDs - (Shock and Vibration Resistant)
- ▶ 3M™ Diamond Grade™ Reflective Characters

- ▶ Reverse Polarity Protected
- ▶ Built to Survive Extreme Environments
 - ▶ Black Aerospace-Grade Aluminum Frame
 - ▶ Impact Resistance and Sealed Lens
 - ▶ Withstands Power-Hose Cleaning
- ▶ Lightweight and Easy to Install!
- ▶ Available in 110VAC & 220VAC
- ▶ Rated IP66 & IP67
- ▶ Standard Reflective Color Options
 - ▶ Fluorescent Yellow Green (Y)
 - ▶ Fluorescent Amber (A)
 - ▶ Fluorescent White (W)
- ▶ Visible up to 750ft (230m)!

Part Number	Character Height	Weight	Frame Dimensions		Volts (VDC)	Amps	Watts
			Height	Width			
VID-BLE3C16-24V-BKX (2 to 4 characters) x = reflective color	16" 406.40 mm	36 lbs 16.33 kg	21.25"	35.25"	12	11.25	135
			539.75 mm	895.35 mm	24	5.63	135

3-Sided LED Reflective Backlits

1 YEAR LIMITED WARRANTY

Light Duty (For Pick-up Trucks or Passenger Vehicles)



VID-SA
(shown above with LED Beacon)

- ▶ Internal High Performance Illumination with Backlit Technology and 3M™ Diamond Grade™ Reflective material for Day & Night Visibility!
- ▶ Up to (4) Character & Numeric Options
- ▶ High-illumination with standard powered 12VDC Cigarette Cord. Powered & Non-powered Options!
- ▶ Heavy Duty Ultra-High Density shell providing resistance towards water and extreme weather!
- ▶ Constructed with (3) Heavy Duty Magnets withstanding speeds of up to 50 MPH (80km/hr)
- ▶ Lightweight & Easy to Install, No Maintenance!

Also Available with or without a Whip and/or Beacon!



(3) Heavy Duty Magnetic Feet with Cigarette Cord



VID-S



UPM3-TMVA (with VID-SA)

Part Number	Character Height	Weight	Frame Dimensions		Volts (VDC)	Amps	Watts
			Height	Width			
VID-S (2 to 4 character)	7.25" 184.15 mm	6 lbs 2.72 kg	8.00"	20"x20"x20"	12	.156	1.87
			203.20 mm	508.00 mm	24	.078	1.87

Super Duty (For Auxiliary Equipment Identification)



12" H characters

- ▶ Consists of (3) NVIZN™ displays mounted on a 3-Sided, Super Duty frame structure for clear visibility at multiple angles Day and Night!
- ▶ 3M™ Diamond Grade™ Reflective Characters
- ▶ Advanced Backlit Technology for Max Visibility
 - ▶ Advanced Temperature Control LEDs - (Shock and Vibration Resistant)
- ▶ Open-Framed structure built to survive the most Extreme Environmental Conditions!
 - ▶ Black Aerospace Grade Aluminum Sign Frame
 - ▶ Impact Resistance and Sealed Lens
 - ▶ Withstands Power-Hose Cleaning
- ▶ Reverse Polarity Protected
- ▶ Visible up to 500ft (152m)!

5 YEAR LIMITED WARRANTY

Frame also Compatible with LED Programmable Displays!

LED Color Options: **R** Red **A** Amber **G** Green **B** Blue

Part Number	Character Height	Weight	Frame Dimensions		Volts (VDC)	Amps	Watts
			Height	Width			
VID-3SBL3N12CS-x (Up to 4 characters) x = reflective color	12" 304.80 mm	110 lbs 49.90 kg	24.61"	32.38"	12	22.60	270
			625.10 mm	822.45 mm	24	11.30	270


Medium Duty (For Auxiliary Equipment)



VID-LA
(shown above with LED Beacon)

- ▶ Manufactured with 3M™ Diamond Grade™ Reflective material for Clear Nighttime Visibility when equipment is turned off!
- ▶ Up to (4) Character & Numeric Options
- ▶ High-illumination with standard powered 12VDC Cigarette Cord. Powered & Non-powered Options!
- ▶ Heavy Duty Ultra-High Density shell providing resistance towards water and extreme weather!
- ▶ Constructed with (4) Heavy Duty Magnets with up to 600 lbs (272.15kg) of magnetic pull!
- ▶ No Maintenance & Easy to Install!

Also Available with or without a Whip and/or Beacon!



(4) Heavy Duty Magnetic Feet with Cigarette Cord

1 YEAR LIMITED WARRANTY

Part Number	Character Height	Weight	Frame Dimensions		Volts (VDC)	Amps	Watts
			Height	Width			
VID-L (2 to 4 character)	8.30" 210.82 mm	20 lbs 9.07 kg	10.00"	28"x28"x28"	12	.156	1.87
			254 mm	28"=711 mm	24	.078	1.87

NVIZN™ Display Accessories



Mounting Brackets, Communication Cables, Power Supply & Converters, Power Cords, Power Harnesses, and much more!

We supply high quality Mounting Hardware and Communication Accessories for your NVIZN™ Identification Display. Multiple sizes, lengths and customizable options are readily available to maximize the performance of your display. Purchase yours today!



VID-S12-2
Steel Mounting Bracket Set (includes Hardware)



VID-110-240V PS
Power Supply, 2 Pin Male Deutsch (277 Vac to 24Vdc)



VID-PC12-50-1
50 ft Power Cord Extension, 12 Gauge, 2-Wire with Deutsch Connector



VID-PC16-50-1
50 ft Power Cord Extension, 16 Gauge, 2-Wire with Deutsch Connector



VID-PC14-25-2
25 ft Power Cord Extension, 14 gauge, with Deutsch Connector on both ends

Universal Platform Mounting Systems



Complete Customizable Mounting Systems for Alternative Mounting Locations, Maximizing Vehicle & Equipment Visibility!

Driver Industrial Safety™ strives for the best possible safety solutions to maximize safe site operations globally. We are constantly driving our product ideation towards improving Vehicle and Equipment visibility standards. Our SafetyWhips® Universal Platform Mounting Systems epitomize innovation by supplying your team with alternative mounting solutions for multiple standard communication devices on any type of vehicle or equipment. These mounting systems are high-strength and extremely durable; constructed of a powder-coated Steel Platform surface (for magnetic devices) and various mounting holes to securely attach all basic Safety and Communication Devices directly to the platform. Customers with non-magnetic vehicles and equipment find this solution most beneficial with it's versatility; can be installed within a vehicle's hitch (with a SafetyWhips® Hitch Mount) or mounted on the rear of a toolbox. Mounting these units are very easy and perfect for temporary use. Your outfitting possibilities are endless as we offer full customization opportunities per jobsite protocol. Simply add one of our custom NVIZN™ 3-Sided Light Duty Identification Displays, a Helios Warning Lights® heavy duty LED Beacon, then top off with a SafetyWhips® Heavy Duty Whip (up to 12ft). All mounted atop a 3ft or 5ft heavy duty for a completed system. Depend on Driver for your jobsite safety solutions!



Aluminum-Bodied Vehicles have found their match with our Universal Platform Mount Systems!

Powered & Non-Powered Options Available



Product Part # Matrix	
	UPM 5 NP - QD V SA - SDL
Pole Length	3 (3' Pole) 5 (5' Pole)
Power Type?	NP Only use if not powered
Mount Type	NM (No Mount) TM (Threaded Mount) QD (Quick Disconnect)
Strobe Type	SA Strobe Amber SG Strobe Green
VID?	V Only include with VID
SDL?	SDL Only include with SDL

IP RATED IP66/IP67

UPM3-TMVSA

3ft (.91m) Pole with Triangle Plate Shown mounted with UPMT on toolbox with 3ft (.91m) SafetyWhips® Heavy Duty Whip, NVIZN® 3-Sided Light Duty Identification Display, & HELIOS Warning Lights® X-MOD Amber LED Beacon

Toolbox / Side Wall Mount & Hitch Mounts all sold separately


UPM5-TMVSA

5ft (1.52m) Pole with Triangle Plate Shown mounted with 3ft (.91m) SafetyWhips® Heavy Duty Whip, NVIZN® 3-Sided Light Duty Identification Display, & HELIOS Warning Lights® X-MOD Amber LED Beacon

* For use with 5ft (1.52m) Poles Only

All Systems include Pole, Triangle Plate & External Waterproof Connector!


Recommended Hitch Mounts & Replacement Parts




UPMT
Heavy Duty Side Mount with Quick Pin. Bolt to toolbox or other sturdy parts of vehicle.



HM-B/U Alarm
107db Backup Alarm
12V to 24V



HM-Pin with Cotter Pin
5/8" x 3" Hitch Mount Pin with Cotter Pin. Fits all Hitch Mounts.



HM-Trailer Plug
Trailer End plug with 7-Way plastic connector



HMTD*
Telescoping Base, includes 7-Way Plug Powered with Deutsch Connector. (Non-powered, Part #: HMTNP)



HMTDA*
Telescoping Base, includes 7-Way Plug, built-in 107db Backup Alarm. Powered with Deutsch Connector. (Non-powered, Part #: HMTNPA)



HMLTD*
Telescoping Base, Includes 7-Way Plug. Powered with Deutsch Connector (Non-powered, Part #: HMLTNP)



HMLTDA*
Telescoping Base, Includes 7-Way Plug and built-in 107db Backup Alarm. Powered with Deutsch Connector (Non-powered, Part #: HMLTNPA)



Meet Our Brand



TORO®

- ➔ Largest Selection of Wheel Chock Solutions for Various Industries
- ➔ Most Dependable Wheel Chocks in the Industry
- ➔ Field Tested for over 10 Years under Harsh Environments
- ➔ 3rd-Party Tested to Meet Compliance Standards
- ➔ Resistant to Oils, Fuels & Solvents
- ➔ Tough Urethane Construction
- ➔ Manufactured in the USA



Heavy Duty Wheel Chocks



Most Dependable in the Industry ▪ **Tough Urethane Construction** ▪ **Manufactured in the USA** ▪ **Field Tested for Over 10 Years!**

We pride ourselves with the precision and rugged construction of our TORO® products. TORO® Wheel Chocks surpass quality standards and are all manufactured in the USA. Driver Industrial Safety™ hit the mark with its TORO® product lines; leading the industry in reliable and dependable chocking solutions for any type of vehicle or heavy equipment. TORO® chocks comply with multiple industry safety requirements including MSHA (Mine Safety and Health Administration), OSHA (Occupational Safety and Health Administration), NFPA (National Fire Protection Agency), DOT (Department of Transportation), SAE (Society of Automotive Engineers), and ANSI (American National Standards Institute) standards. We offer a variety of wheel chock structure styles to serve specific industry needs as well as ANSI compliant safety color and custom color options (General Purpose chocks only) for added support in providing safe and creative site-management solutions to ensure a safe working environment at all times.

Our General Purpose line of TORO® wheel chocks are engineered for quick and secure installation typically used for Land Vehicles such as trailers, pickups, utility vehicles, dual axle vehicles, and other standard size vehicles. Constructed with tough Urethane for lightweight and easy mobility, high visibility ANSI compliant safety colors and holes for mounting with rope, chains, or mounting brackets. All model styles are 3rd-party tested for compliance and support GVW's (Maximum Gross Vehicle Operating Weight) ranging from 15 Ton (30,000lbs or 13,607.77kg) to 40 Ton (80,000lbs or 36,287.39kg).

Our Heavy Equipment line of TORO® wheel chocks are heavy duty and engineered to safely secure Heavy Equipment Vehicles such as haul trucks, loaders, cranes, fire department vehicles, large military trucks, and heavy underground mining vehicles. Constructed with tough Urethane for lightweight and easy mobility with built-in strong carrying handle on the back side of each wheel chock. These large chocks are highly visible (ANSI compliant safety colors) with user-friendly mounting bracket options for quick and secure loading on the vehicle. All model styles are 3rd-party tested for compliance and support Maximum Payload Capacities ranging from 40 Ton (80,000lbs or 36,287.39kg) to 400 Ton (1,600,000lbs or 362,873.90kg).



WC-UY700
70 Ton TORO® wheel chocks
(shown on a heavy equipment loader)

TORO® Wheel Chocks "User Safety" & "Proper Chocking Procedures" Guides available upon request!

PROPER CHOCKING



ATTENTION! Wheel Chock Users...

IMPORTANT SAFETY WARNINGS AND INSTRUCTIONS: Wheel chocks are extremely effective safety tools providing optimum security when used correctly. Users must comply with all warnings, guidelines and instructions provided with each TORO® product. Wheel chocks **MUST BE** used in pairs, positioned downhill firmly against the tire and below the truck's center of gravity. Meaning, place a chock in front of both front tires if the truck is disabled and traveling down a grade, and in traveling up a grade while disabled place a chock in back of both rear tires of the truck. If the direction of the grade cannot be determined chock the front and back of one wheel. In severe conditions, it's necessary to use multiple pairs of chocks. Wheel chocks **MUST BE** positioned firmly and squarely against the center of the tire tread. If not properly positioned, the wheel chock will not be effective to it's expected potential. These are generally accepted chocking procedures, and it is the responsibility of the end user to make the final determination of how the vehicle should properly be chocked based on the provided circumstances. Our main goal is to inform and educate users on how to properly use our TORO® wheel chocks. Testing & qualification is required for individual vehicles and for correct product selection to meet site requirements. Many factors **MUST BE** considered before selecting and using our wheel chocks. Advised Gross Vehicle Operating Weight (GVW) is a guide only. This will vary due to environmental factors. Please complete an adequate risk assessment before using the chocks. **DO NOT** use chocks if chocks are damaged. Perform regular inspections looking for cracking, chipping, and any other noticeable concerning physical malfunctions.



POSITION CHOCK TIGHTLY AGAINST TIRE TREAD



3 TIRE SIZE
IDENTIFY the tire diameter of the vehicle to select the correct wheel chock needed.

1 GROSS VEHICLE OPERATING WEIGHT
MUST understand the GVW of the vehicle to determine the necessary wheel chock for your specific requirements.

2 MAXIMUM LOAD CAPACITY
Based per chock. Each chock is designed to handle a certain amount of Tonnage. **MINIMUM** of (2) chocks required per vehicle.

4 GROUND SURFACE
BE AWARE of the environmental conditions and ground surface the tires are exposed to.

Wheel Chock Accessories



Mounting Brackets: For General Purpose Wheel Chocks

Heavy Duty Vertical Wheel Chock Mounting Unit



WC-BKT6.5

For Use Only With:
WC-U0600 and WC-U0650 TORO® Wheel Chocks



Heavy Duty Vertical Mounting Brackets for the General Purpose Wheel Chocks

Part Number	WC-BKT6.5		WC-BKT4
	WC-U0650	WC-U0600	WC-U0400
Fits Wheel Chock Models	WC-U0650	WC-U0600	WC-U0400
Max. Payload Capacity	35 Ton	25 Ton	15 Ton
Maximum GVW	70,000 lbs (31,751kg)	52,000 lbs (23,587kg)	30,000 lbs (13,608kg)
Height	1.75" (4.45 cm)		1.58" (4.01 cm)
Width	11.63" (29.54 cm)		9.94" (25.28 cm)
Length	11.56" (29.36 cm)		8.56" (21.74 cm)
Weight	2.80 lbs (1.27 kg)		1.90 lbs (0.86 kg)

Mounting Hardware NOT Included!

- ▶ Vertical orientation for quick removal and return of wheel chocks
- ▶ Constructed with heavy duty 16 gauge stainless steel material for extended durability
- ▶ (2) brackets needed for roped models: WC-U0400-2R, WC-U0600-2R, WC-U0650-2R

Testing and qualification is required for individual vehicles for correct product selection to meet site requirements

Advised GVW is a guide only. This will vary due to environmental factors. Please complete an adequate risk assessment before using chocks. Do not use chocks if they are damaged.

Replacement Rubber Pad / Aluminum Cleat: For WC-UY720 and WC-UY730 Chocks Only



Slip-Resistant, Rubber Traction Pad

(2) Required Per Chock



Part #: WC-RP-720/WC-RP-730

(1) Replacement Rubber Pad



Heavy Duty Aluminum Cleat

(2) Required Per Chock



Part #: WC-Cleat-720/WC-Cleat-730

(1) Replacement Aluminum Cleat



Toro WC-UY720 Model
Standard with (2) Rubber Pads








Toro WC-UY720-AC Model
Standard with (2) Aluminum Cleats

General Purpose Wheel Chocks



Most Dependable in the Industry ▪ Tough Urethane Construction ▪ Manufactured in the USA ▪ Field Tested for Over 10 Years!



PRODUCT Part #	TIRE SIZE (up to)	DIMENSIONS L x W x H		WEIGHT (lbs/kg)	MAX. GVW (Maximum Gross Vehicle Operating Weight)
 WC-U0400*	35"	L	8.5" (21.6 cm)	2.2 lbs (1.0 kg)	15 Ton 30,000 lbs (13,607.8 kg)
		W	7.3" (18.4 cm)		
		H	6.9" (17.5 cm)		
 WC-U0450*	35"	L	11.0" (27.9 cm)	4.5 lbs (2.0 kg)	20 Ton 40,000 lbs (18,143.7 kg)
		W	7.7" (19.6 cm)		
		H	8.3" (21.0 cm)		
 WC-U0500*	32"	L	10.0" (25.4 cm)	4.5 lbs (2.0 kg)	15 Ton 30,000 lbs (13,607.8 kg)
		W	8.5" (21.6 cm)		
		H	5.3" (13.5 cm)		
 WC-U0600*	46"	L	11.5" (29.2 cm)	4.5 lbs (2.0 kg)	25 Ton 50,000 lbs (22,679.6 kg)
		W	9.0" (22.9 cm)		
		H	8.8" (22.2 cm)		
 WC-U0650*	46"	L	11.5" (29.2 cm)	6 lbs (2.7 kg)	35 Ton 70,000 lbs (31,751.4 kg)
		W	9.0" (22.9 cm)		
		H	8.8" (22.2 cm)		


* minimum of (2) chocks required

Testing and qualification is required for individual vehicles for correct product selection to meet site requirements

Advised GVW is a guide only. This will vary due to environmental factors. Please complete an adequate risk assessment before using chocks. Do not use chocks if they are damaged.

Mounting Brackets available for select Wheel Chocks (Refer to Page 17)

Rubber Wheel Chocks




 WC-1100BY-R2 Set with Rope	N/A	L	8.0" (20.3 cm)	8 lbs (3.64 kg)	N/A
		W	4.0" (10.2 cm)		
		H	4.0" (10.2 cm)		

Heavy Equipment Wheel Chocks



Most Dependable in the Industry ▪ Tough HDPE Construction ▪ Manufactured in the USA ▪ Field Tested for Over 10 Years!



PRODUCT Part #	TIRE SIZE (up to)	DIMENSIONS L x W x H		WEIGHT (lbs/kg)	MAX. PAYLOAD CAPACITY	MAX. GVW (Maximum Gross Vehicle Operating Weight)
		L	W			
 WC-UY700*	65" (165.1 cm)	L	17.5" (44.5 cm)	27 lbs (12.2 kg)	70 Ton (63,503.0 kg)	245,000 lbs (111,130.0 kg)
		W	15.0" (38.1 cm)			
		H	15.0" (38.1 cm)			
 WC-U0710*	65" (165.1 cm)	L	15.0" (38.1 cm)	14.3 lbs (6.5 kg)	70 Ton (63,503.0 kg)	245,000 lbs (111,130.0 kg)
		W	15.0" (38.1 cm)			
		H	11.0" (27.9 cm)			
 WC-UY720*	38" (96.5 cm)	L	15.8" (40.0 cm)	7.6 lbs (3.4 kg)	40 Ton (36,287.4 kg)	80,000 lbs (36,287.4 kg)
		W	8.5" (21.6 cm)			
		H	8.5" (21.6 cm)			
 WC-UY730*	46" (116.8 cm)	L	21.0" (53.3 cm)	16.1 lbs (7.3 kg)	75 Ton (68,038.8 kg)	150,000 lbs (68,038.8 kg)
		W	11.3" (28.6 cm)			
		H	12.3" (31.1 cm)			
 WC-UY750*	105" (266.7 cm)	L	18.0" (45.7 cm)	19 lbs (8.6 kg)	165 Ton (149,685.5 kg)	550,000 lbs (249,475.6 kg)
		W	14.5" (36.8 cm)			
		H	10.0" (25.4 cm)			
 WC-UY810*	142" (360.7 cm)	L	22.0" (55.9 cm)	24 lbs (10.9 kg)	255 Ton (231,332.2 kg)	855,000 lbs (387,821.2 kg)
		W	15.0" (38.1 cm)			
		H	10.5" (26.7 cm)			
 WC-UY910**	165" (419.17 cm)	L	24.5" (62.2 cm)	32 lbs (14.5 kg)	400 Ton (362,874.0 kg)	1,600,000 lbs (725,747.2 kg)
		W	13.5" (34.3 cm)			
		H	16.0" (40.6 cm)			

Testing and qualification is required for individual vehicles for correct product selection to meet site requirements
 Advised GVW is a guide only. This will vary due to environmental factors. Please complete an adequate risk assessment before using chocks. Do not use chocks if they are damaged.

- * Minimum of (2) chocks required
- ** Minimum of (4) chocks required



Meet Our Brand

HELIOS®


WARNING LIGHTS

X-MOD series

- ➔ Revolutionary LED Beacons with Universal Easy Mount Design
- ➔ Designed to meet Class I/II & California Title 13 Requirements
- ➔ Heavy Duty, Fully Replaceable Part Structure
- ➔ Easy Selectable Color Options (Single & Dual)
- ➔ Multi-Voltage from 10 to 48 VDC
- ➔ Low Amperage Draw
- ➔ Various Mounting Solutions
- ➔ Manufactured in the USA




Overmolded
Magnetic Feet!

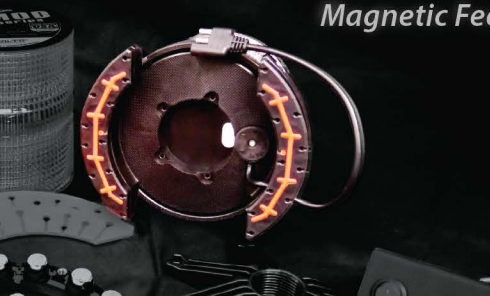

X-MOD Series Heavy Duty LED Beacons



Multi-Voltage ■ **Universal Easy Mount Design** ■ **Fully Replaceable Part Structure** ■ **Easy Configuration!**

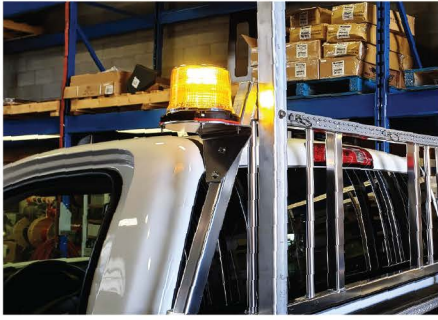

HE-XB-SPA-W

X-MOD Series LED Beacon mounted on vehicle rack
(Permanent Mount, Short Profile - Amber Lens & White LEDs)



HE-XB-HPC-G

X-MOD Series LED Beacon shown with our SafetyWhips®
4ft Super Duty Powered Whip and Heavy Duty Safety Flag
(Permanent Mount Beacon, Short Profile - Clear Lens & Green LEDs)

Driver Industrial Safety™ drove game changing innovation with its X-MOD Series heavy duty LED beacon line. Engineered with the most groundbreaking technology and design, the X-MOD Series stands apart from all market competition. Boasting quality, durability, and cutting-edge capabilities to ensure the right for various jobsite needs. For years, our Helios Warning Lights® products are known to deliver solid product performance, easy maintenance, and versatility. Helios Warning Lights® X-MOD Series portrays that and much more. Our X-MOD Series beacons are industrial strength, multi-voltage from 10 to 48vdc, meet Class I/II & California Title 13 Requirements. All X-MOD internal components are protected with an impact resistant outer polycarbonate dust dome that has a smooth, dust-free finish that is very easy to clean. Our optically enhanced Fresnel lens design is revolutionary to the industry for leading-edge quality LED light output. Available in both Single and Dual Colors, with easy selectable colors and flash patterns!

The X-MOD Series Modular Replaceable Parts are a remarkable feature! Enabling you to manage your fleet of beacons with minimal replacement cost of replaceable parts versus buying a new beacon each time. Along with a fully replaceable part structure, X-MOD beacons are constructed with a Universal Easy Mount Design for use on all vehicles including Aluminum Bodied & "Ribbed" Roofs. The Aerodynamic and Ribbed "Easy Mount" Design provides superior performance for all vehicles and safely operates at speeds up to 75 mph (121 kmh).

Driver Industrial Safety's X-MOD beacons are Made in the USA and backed by an industry leading 3-year limited warranty. Industrial industries such as mining, construction, and transportation experience harsh weather and working conditions which require a strong robust warning light. When it comes to extreme durability and adaptable warning lights, Driver Industrial Safety's X-MOD Series has you covered!

Full Color LED Options Available!



EASY CONFIGURATION

EASY TO REPLACE PARTS

All Models Designed & Manufactured to Meet Class I/II & California Title 13 Requirements
Various Mounting Solutions: Permanent, Magnetic, and Pipe Mount



Multi-Voltage



Short & High Profiles



Single, Dual & Multi-Color LEDs

Safe to use at speeds of 121 kmh (75mph)!



HE-XB-SPC-x
Permanent Mount
(Short Profile / Clear Lens)
(x = Single LED Color)



HE-XB-HMC-xx
Magnetic Mount
(High Profile / Clear Lens)
(xx = Dual LED Colors)



HE-XB-SPA-W
Permanent Mount
(Short Profile / Amber Lens)



HE-XB-HMA-W
Magnetic Mount
(High Profile / Amber Lens)


SHORT PROFILE



HIGH PROFILE



BASE VIEW




For X-MOD Accessories & Replacement Parts
(Refer to Page 23)

X-MOD Single & Dual Color LED Beacons



Safe to Use at Speeds of 121kmh (75mph) ▪ Multiple Replaceable Parts ▪ User-Friendly Programming

- ▶ Designed & Manufactured to meet Class/II and California Title 13 Requirements!
- ▶ Universal Easy Mount Design - For use on all vehicles including Aluminum Bodied & "Ribbed" Roofs!
- ▶ Fully Encapsulated LED Driver Interchangeable Module - Providing increased durability against extreme environmental conditions (dust, vibration, and moisture)
- ▶ EASY Selectable Patterns: 10 Flash Patterns
- ▶ LED Light Emitting Modes: Single & Dual
- ▶ EASY Selectable Full Color LED Options: Single & Dual Colors
Standard Programmable Colors - Red, Green, Blue, Amber, White
- ▶ Impact Resistant outer polycarbonate dome with a smooth, dust-free finish and easy to clean!
- ▶ Enhanced Thermal Compensation to stabilize unit performance through various temperature changes
- ▶ Input and Output Filtering to meet EMI regulations & safety standards - For Optimum Performance!
- ▶ Quick Disconnect 10 ft cigarette lighter extension cord
- ▶ Various Mounting Solutions & Conversion Kits Available: Permanent Mount, Magnetic Mount, 1" Pipe Mount



PRODUCT SPECIFICATIONS: Single & Dual Color Models (Permanent, Magnetic, and Pipe Mount)

FLASH PATTERNS	VOLTAGE*	AMPERAGE DRAW	
		Flashing Mode #2: Single flash with 4 second period	
10	10 - 48 VDC <small>*The beacon will operate from 9VDC to 50VDC</small>	12 VDC	0.49 Amps
		24 VDC	0.40 Amps
RECOMMENDED ACCESSORIES	POWER CORD	SWITCH KIT	ADDITIONAL MOUNTING OPTIONS
	HE-XBP-CP (Cigarette Cord)	HE-XBP-SW2 (For Both Single & Dual Color Beacons)	HE-XBP-MPL (For use on Non-Magnetic Surfaces) HE-XBP-PIM (1" Pipe Mount Kit for quick & easy beacon installation)



HE-XB-HPA-W
High Profile Permanent Mount
Amber Fresnel Lens, White LEDs



HE-XB-SPC-G
Short Profile Permanent Mount
Clear Fresnel Lens, Green LEDs

All Model Types are Available in Clear or Amber Lenses (Short or High Profile)

Helios Warning Lights® X-MOD Series Beacons are heavy duty and constructed with a durable **Universal Easy Mount Design** for use on all vehicles including Aluminum Bodied & "Ribbed" Roofs. The Aerodynamic and Ribbed "Easy Mount" Design provides superior performance at operational speeds for all vehicles including those with a roof which is ridged, ribbed, or corrugated in any way. For increased beacon stability, X-MOD's magnetic mounting option features strong, overmolded magnetic feet. Also preventing any vehicle damage or scratches. When it comes to reliable solutions, Driver Industrial Safety™ has you covered!

Overmolded Magnetic Feet



"Ribbed" Roof example shown above

Ensuring Optimal Performance withstanding speeds up to 121 kmh/75mph!

Mounting Conversion Kits also available for purchase!
For X-MOD Mounting Conversion Kit Option (Refer to Page 23)

X-MOD Accessories: Replacement Parts, Mounting & Conversion Kits



Full Line of Modular Replacement Parts ▪ High Quality, Cost-Efficient Replacements ▪ Various Mounting Options



Heavy Duty Clear Beacon Dome

Short Profile (HE-XBP-SC)
High Profiles (HE-XBP-HC)

Overmolded magnetic feet to prevent vehicle damage!

Internal LED Driver Module

LED Light Emitter

Heavy Duty Fresnel Lens

Short & High Profiles

Universal Base

(HE-XBP-UB)

2 Switch

For Single & Dual Color LED Beacons (HE-XBP-SW2)

Cigarette Plug Power Cord

(HE-XBP-CP)

Magnetic Mounts (Set of 2)

Set of 2 (HE-XBP-MM)

Pipe Mount Kit

(HE-XBP-PIM)

All Replaceable Parts are sold separately – Mounting & Conversion Kits and Individual Parts are available for purchase.

Keeping a few of our X-MOD Series replaceable parts in stock will help to ensure you are never without a warning light! Reap the financial rewards and purchase your Helios Warning Lights® X-MOD Series Heavy Duty Beacon today!

Driver Industrial Safety's X-MOD Series offers Modular Replaceable Parts, which enable you to manage your fleet of beacons with the minimal replacement cost of replaceable parts versus buying a new warning light due to unpredictable jobsite changes. The X-MOD beacon is engineered to ensure simple configuration and easy replacement of all parts to satisfy those customizable needs for your fleet!



HE-XBP-HL-A HE-XBP-SL-A

Best-In-Class, Optically Clear Short and High Amber Lenses



HE-XBP-HL-C HE-XBP-SL-C

Best-In-Class, Optically Clear Short and High Clear Lenses



HE-XBP-HC HE-XBP-SC

Impact Resistant, Optically Clear 6" (High) and 4" (Short) Beacon Dome Covers



HE-XBP-DS / HE-XBP-DD

Single or Dual LED Driver Modules for use with Single or Dual LED Light Emitters



HE-XBP-ES-x / HE-XBP-ED-xx (x = LED color/s)

Single or Dual LED Light Emitter compatible with Short and High Profile Beacons



HE-XBP-UB

Heavy Duty Universal Base



HE-XBP-SW2

2 Switch used for Single and Dual Color LED Beacons and Minibars



HE-XBP-PIM

1" Pipe Mount Kit allows for quick and easy installation of any X-MOD Heavy Duty LED Beacon



HE-XBP-MM

Magnetic Mounting Kit (2) providing extra protection for vehicles with its over-molded magnetic feet



HE-XBP-PM

Permanent Mounting Pad Kit with (2) rubberized sole pads and hardware for easy permanent installation



HE-XBP-MPPL

Custom Steel Permanent Mounting Kit with (2) steel plates, powder-coated for rust protection & (6) holes to secure to beacon. 3M VHB adhesive on base of plates for mounting to Non-metallic surfaces.

Available Mounting Conversion Kits

Part Number	Description
HE-XBP-PM/MM	Permanent Mount to Magnetic Mount
HE-XBP-PM/PIM	Permanent Mount to 1" Pipe Mount
HE-XBP-MM/PM	Magnetic Mount to Permanent Mount
HE-XBP-MM/PIM	Magnetic Mount to 1" Pipe Mount
HE-XBP-PIM/PM	1" Pipe Mount to Permanent Mount
HE-XBP-PIM/MM	1" Pipe Mount to Magnetic Mount




Meet Our Brand

The logo features a red flag with a white saltire (X-shape) on a black pole. To the right of the flag, the words "Safety Whips" are written in a large, white, sans-serif font, and "USA" is written in a smaller, red, sans-serif font with a registered trademark symbol (®) to its upper right.

Safety Whips^{USA}

- ➔ Your Leading Safety Whip Manufacturer!
- ➔ Field-Proven for over 20 Years
- ➔ Most Dependable & Visible Whips in the Industry
- ➔ Various Safety Driven Whip Solutions for Harsh Environments
- ➔ Advanced LED Light Technology
- ➔ Premium UV Protected Fiberglass
- ➔ Customizable Whip Assemblies
- ➔ Manufactured in the USA

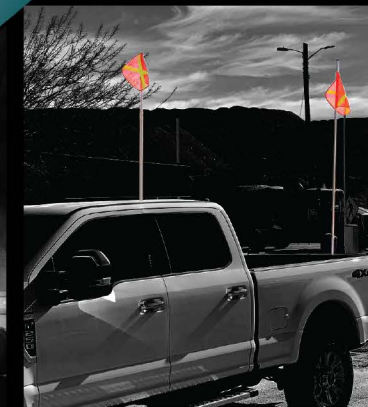


Complete Warning Whip & Safety Solutions



Leading Safety Whip Manufacturer ▪ Most Dependable in the Industry ▪ Mine-Specified ▪ Field Tested for Over 20 Years!

Our SafetyWhips® brand is globally recognized as a premier brand of USA-made Safety Products & Whip Solutions for all vehicle types & equipment needs. Driver Industrial Safety™ produces the highest quality Whips available on the market today. We proudly support the Heavy Equipment industries, Mining, Agricultural, Construction, Aviation, Transportation, & more. Our Complete Whip Solutions offer the most advanced LED light technology supporting various industrial safety programs and practices. In all efforts to secure jobsite requirements and excel safe site practices, Driver Industrial Safety™ continues its drive towards innovative Safety Product Solutions with our various SafetyWhips® product lines; offering customizable options specific to your industry and management needs!

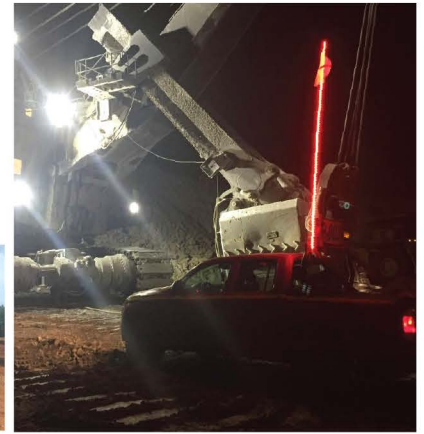

SDL10R-XY
10ft Red Super Duty LED Whip
(shown on minesite support vehicle)

Light Duty Warning Whips



Non-Powered Whips!

SafetyWhips® Light Duty Whips are constructed of safe & non-conductive Fiberglass for all Light Duty vehicle & equipment needs. These non-powered whips are not only affordable, but include a variety of durable flag & mounting options for flag identification of objects or vehicles. Standard whip lengths range from 2ft (.61m) up to 7ft (2.13m) with customizable lengths available upon request. Outfit your fleet today with these affordable Light Duty Warning Whips!



Also Available
in 5/8" rod
(ATV375 models)



ATV308-5-SXY
5ft (1.52m), 5/16" rod
Standard Light Duty Whip
11.5" orange safety flag with reflective "X"



LWW05-M
5ft (1.52m), 5/16" rod
Light Duty Whip with Window Mount
11.5" orange safety flag



LWW-MOUNT
Light Duty
Window Mount
Bracket



LWM-BH-100
Light Duty
Magnet Cup

LWM05-SXW
5ft (1.52m), 5/16" rod
Light Duty Whip with Magnet Mount*
11.5" orange safety flag with reflective "X"

SW-PLATE MOUNT 4
Available for LWM
Whips for Mounting
on Non-Magnetic
Surfaces

STANDARD SAFETY FLAG OPTIONS



Heavy Duty Mesh, Fluorescent
Safety Colors, UV Resistant,
Anti-Microbial & Fray Resistant



FLAG11-O
Orange
11.5"L x 11.5"H



FLAG11-O-XY
Orange with Yellow Reflective "X"
11.5"L x 11.5"H



FLAG11-O-XW
Orange with White Reflective "X"
11.5"L x 11.5"H

Light Duty Whips (non-powered) Select Light Duty Whips also Available with No Flag, No Bulkhead, No Base - Upon Request

Part # (x=flag option)	Whip Length	Product Description
ATV308-5	5 ft (1.52m)	(5/16" diameter) All Weather Fiberglass Whip, Threaded Bulkhead, with NO FLAG
ATV308NB-5-x	5 ft (1.52m)	(5/16" diameter) All Weather Fiberglass Whip, NO BULKHEAD, with Heavy Duty Mesh Safety Flag
ATV308-5-x	5 ft (1.52m)	(5/16" diameter) All Weather Fiberglass Whip, Threaded Bulkhead, with Heavy Duty Mesh Safety Flag
ATV375-5	5 ft (1.52m)	(3/8" diameter) All Weather Fiberglass Whip, Threaded Bulkhead, with NO FLAG
ATV375NB-5-x	5 ft (1.52m)	(3/8" diameter) All Weather Fiberglass Whip, NO BULKHEAD, with Heavy Duty Mesh Safety Flag
ATV375-5-x	5 ft (1.52m)	(3/8" diameter) All Weather Fiberglass Whip, Threaded Bulkhead, with Heavy Duty Mesh Safety Flag
LWW05	5 ft (1.52m)	All Weather Fiberglass Whip with Light Duty Window Mount (includes brackets), with NO FLAG
LWW05-x	5 ft (1.52m)	All Weather Fiberglass Whip with Light Duty Window Mount (includes brackets), with Mesh Safety Flag
LWM05	5 ft (1.52m)	All Weather Fiberglass Whip with Light Duty Magnet Mount (includes brackets), with NO FLAG
LWM05-x	5 ft (1.52m)	All Weather Fiberglass Whip with Light Duty Magnet Mount (includes brackets), with Mesh Safety Flag

For Additional Safety Flags
(Refer to Page 35)

For Mounting & Accessories
(Refer to Pages 36-39)



Heavy Duty Warning Whips: Threaded Mount (Non-Powered)



Powered Whips Also Available!

SafetyWhips® Heavy Duty Whips are our most common sold whip on the market today! SafetyWhips® Threaded Mount whips are constructed of high quality, safe and non-conductive Heavy Duty Fiberglass with a corrosion-resistant Threaded Hex base for Heavy Duty vehicle & equipment needs. Offered as a Single Piece, Two-Piece Breakdown or even Split-Pole options with Fiberglass Whip Extensions available for added length. Standard whip lengths available from 3ft (0.91m) up to 12ft (3.66m) and whip extensions from 1ft (.30m) to 6ft (1.83m). Customize your Heavy Duty Warning Whip with our array of SafetyWhips® Accessories!



W05NP-X
5ft (1.52m), 1/2" rod
Non-Powered with
16" orange safety flag
with reflective "X"



Sealed
Rubber Cap



Threaded
Bulkhead

W08NP-SXY
8ft (2.44m), 1/2" rod
Non-Powered with
11.5" orange safety flag
with reflective "X"



Heavy Duty Stainless
Steel Fitting for Secure
Whip Connection!



W10BDSTNP-X
Two-Piece Breakdown Whip
10ft (3.05m), 1/2" rod
Non-Powered with 16" orange
safety flag with reflective "X"



EXT-3NP
Heavy Duty Whip Extension
3ft (.91m), 1/2" non-tapered rod
with Threaded Stainless Steel
fittings at top and bottom

Part # Length

EXT-1NP	1ft (.30m)
EXT-2NP	2ft (.61m)
EXT-3NP	3ft (.91m)
EXT-4NP	4ft (1.22m)
EXT-6NP	6ft (1.83m)

STANDARD SAFETY FLAG OPTIONS



Heavy Duty Mesh, Fluorescent
Safety Colors, UV Resistant,
Anti-Microbial & Fray Resistant



FLAG11-O
Orange
11.5"L x 11.5"H



FLAG11-O-XY
Orange with Yellow Reflective "X"
11.5"L x 11.5"H



FLAG11-O-XW
Orange with White Reflective "X"
11.5"L x 11.5"H



FLAG16-Y-XW
Yellow with White Reflective "X"
16"L x 16"H



FLAG16-G-XW
Green with White Reflective "X"
16"L x 16"H

Standard Whip Lengths	Single Piece, Threaded Whips			Two-Piece, Threaded Breakdown Whips		
	Part #	Part #	Part #	Part #	Part #	Part #
	with 11.5" Mesh Flag	with 11.5" Reflective "X" Mesh Flag	with 16" Reflective "X" Mesh Flag	with 11.5" Mesh Flag	with 11.5" Reflective "X" Mesh Flag	with 16" Reflective "X" Mesh Flag
5 ft (1.52m)	W05NP-M	W05NP-SXY	W05NP-X	W05BDSTNP-M	W05BDSTNP-SXY	W05BDSTNP-X
8 ft (2.44m)	W08NP-M	W08NP-SXY	W08NP-X	W08BDSTNP-M	W08BDSTNP-SXY	W08BDSTNP-X
10 ft (3.05m)	W10NP-M	W10NP-SXY	W10NP-X	W10BDSTNP-M	W10BDSTNP-SXY	W10BDSTNP-X
12 ft (3.66m)	W12NP-M	W12NP-SXY	W12NP-X	W12BDSTNP-M	W12BDSTNP-SXY	W12BDSTNP-X

Custom Whip Lengths & Whip Extensions available upon request!

Recommended Whip Mounts

For Non-Powered, Threaded Mount Whips

Heavy Duty Steel Hitch Mount



HM1NPA
Non-Powered, Threaded Base
Includes 7-Way Plug and
107db Backup Alarm

Threaded Whip Base



519.343NP
Non-Powered
Steel Thread Mount
(optional)

Heavy Duty Spring Base Mounts



519.30BNP
Non-Powered
Zinc Plated

Heavy Duty Angle Bracket Mount



ABM
Permanent Mount
Zinc-Plated Bracket
to attach whips to
toolbox, rack or bed

For Additional Safety Flags
(Refer to Page 35)

For Mounting & Accessories
(Refer to Pages 36-39)



Heavy Duty Warning Whips: Threaded Mount (Powered)



Non-Powered Whips Also Available!

SafetyWhips® Powered Threaded Mount Heavy Duty Whips are our most common whip sold today. Constructed with Heavy Duty Fiberglass, powered with a 1156 Type Socket, and a rust & corrosion resistant Threaded Hex base. Offered as a Single Piece, Two-Piece Breakdown or even Split-Pole options with Fiberglass Whip Extensions available for added length. Standard whip lengths available from 3ft (0.91m) up to 12ft (3.66m) and whip extensions from 1ft (.30m) to 6ft (1.83m). Customize your Powered Heavy Duty Whip with Driver Industrial's various SafetyWhips® Accessories & Mounting Options!



(x = LED color)

W05-X-SC4Cx

5ft (1.52m), 1/2" rod - Powered with Single Color SC4 Series LED Whip Light (Constant Mode) and 16" orange safety flag with yellow reflective "X"



1156 Type Light Socket



Powered Threaded Bulkhead with RCA Connection

W08-SXY

8ft (2.44m), 1/2" rod - Powered with 1156 Type Socket and 11.5" orange safety flag with yellow reflective "X"



Heavy Duty Stainless Steel Fitting for Secure Whip Connection!



(xx = LED colors)

W08BDST-SXY-SC3xx

Two-Piece Breakdown Whip 8ft (2.44m), 1/2" rod - Powered with Dual Color SC3 Series LED Whip Light and 16" orange safety flag with yellow reflective "X"



EXT-3


Heavy Duty Whip Extension 3ft (.91m), 1/2" non-tapered rod with Threaded Stainless Steel fittings at top and bottom

Part # Length

EXT-1NP	1ft (.30m)
EXT-2NP	2ft (.61m)
EXT-3NP	3ft (.91m)
EXT-4NP	4ft (1.22m)
EXT-6NP	6ft (1.83m)

Full Color LED Whip Lights!

Single Color Dual Color



SC4 SERIES (NEW)
Flashing or Non-Flashing Models Available!



SC3 SERIES
All-in-One, Flashing & Non-Flashing Programmable modes!



SCM "MEGA-LITE" SERIES
Mega Programmable, Flashing & Non-Flashing modes!

For all LED Whip Light options (Refer to Page 34)

Standard Whip Lengths	Single Piece, Threaded Whips			Two-Piece, Threaded Breakdown Whips		
	Part #	Part #	Part #	Part #	Part #	Part #
	with 11.5" Orange Mesh Flag	with 11.5" Yellow Reflective "X" Mesh Flag	with 16" Yellow Reflective "X" Mesh Flag	with 11.5" Orange Mesh Flag	with 11.5" Yellow Reflective "X" Mesh Flag	with 16" Yellow Reflective "X" Mesh Flag
5 ft (1.52m)	W05-M	W05-SXY	W05-X	W05BDST-M	W05BDST-SXY	W05BDST-X
8 ft (2.44m)	W08-M	W08-SXY	W08-X	W08BDST-M	W08BDST-SXY	W08BDST-X
10 ft (3.05m)	W10-M	W10-SXY	W10-X	W10BDST-M	W10BDST-SXY	W10BDST-X
12 ft (3.66m)	W12-M	W12-SXY	W12-X	W12BDST-M	W12BDST-SXY	W12BDST-X

Custom Whip Solutions (Lengths, Whip Extensions, Mounting Options) also available upon request!

Recommended Whip Mounts

For Powered, Threaded Mount Whips

Heavy Duty Steel Hitch Mount



HM1A
Powered, Threaded Base Includes 7-Way Plug and 107db Backup Alarm

Heavy Duty Spring Base Mounts



519.30B
Powered Zinc Plated

Threaded Whip Bases



519.343
Powered w/Pigtail Steel Thread Mount (optional)

519.343-RCA
Powered w/RCA Steel Thread Mount (optional)

Heavy Duty Angle Bracket Mount



ABM
Permanent Mount Zinc-Plated Bracket to attach whips to toolbox, rack or bed

STANDARD SAFETY FLAG OPTIONS



Heavy Duty Mesh, Fluorescent Safety Colors, UV Resistant, Anti-Microbial & Fray Resistant



FLAG16-Y-XW
Yellow with White Reflective "X"
16" L x 16" H



FLAG16-G-XW
Green with White Reflective "X"
16" L x 16" H

For Additional Safety Flags (Refer to Page 35)
For Mounting & Accessories (Refer to Pages 36-39)




Heavy Duty Warning Whips: Quick Disconnect (Non-Powered)



Powered Whips Also Available!

SafetyWhips® Quick Disconnect Whips are heavy duty and the most efficient solution for quick removal on your vehicle. These whips are constructed of safe & non-conductive Heavy Duty Fiberglass and well-known for its quick connection, easy removal, and convenient stow-a-way. Offered as a Single Piece, Two-Piece Breakdown or even Split-Pole options with Fiberglass Whip Extensions available for added length. Standard whip lengths available from 3ft (0.91m) up to 12ft (3.66m) with whip extensions from 1ft (.30m) to 6ft (1.83m). Outfit your whip today with our SafetyWhips® Accessories & Mounting Options!

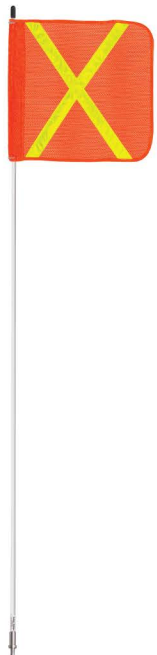

SW05QDNP-X
5ft (1.52m), 1/2" rod
Non-Powered with
16" orange safety flag
with yellow reflective "X"




SW08QDNP-SXY
8ft (2.44m), 1/2" rod
Non-Powered with
11.5" orange safety flag
with yellow reflective "X"



Sealed
Rubber Cap



Quick
Disconnect
Base



SW10QDNP2-X
Two-Piece Breakdown Whip
10ft (3.05m), 1/2" rod
Non-Powered with 16" orange
safety flag with yellow reflective "X"

Heavy Duty Stainless
Steel Fitting for Secure
Whip Connection!



EXT-3QDNP
Heavy Duty Whip Extension
3ft (.91m), 1/2" non-tapered rod with
Quick Disconnect Stainless Steel
fittings at top and bottom

Part #	Length
EXT-1QDNP	1ft (.30m)
EXT-2QDNP	2ft (.61m)
EXT-3QDNP	3ft (.91m)
EXT-4QDNP	4ft (1.22m)
EXT-6QDNP	6ft (1.83m)

STANDARD SAFETY FLAG OPTIONS



Heavy Duty Mesh, Fluorescent
Safety Colors, UV Resistant,
Anti-Microbial & Fray Resistant



FLAG11-O
Orange
11.5"L x 11.5"H



FLAG11-O-X
Orange with Yellow Reflective "X"
11.5"L x 11.5"H



FLAG11-O-XW
Orange with White Reflective "X"
11.5"L x 11.5"H



FLAG16-Y-XW
Yellow with White Reflective "X"
16"L x 16"H



FLAG16-G-XW
Green with White Reflective "X"
16"L x 16"H

Standard Whip Lengths	Single Piece, Quick Disconnect Whips			Two-Piece, Quick Disconnect Breakdown Whips		
	Part #	Part #	Part #	Part #	Part #	Part #
	with 11.5" Orange Mesh Flag	with 11.5" Yellow Reflective "X" Mesh Flag	with 16" Yellow Reflective "X" Mesh Flag	with 11.5" Orange Mesh Flag	with 11.5" Yellow Reflective "X" Mesh Flag	with 16" Yellow Reflective "X" Mesh Flag
5 ft (1.52m)	SW05QDNP-M	SW05QDNP-SXY	SW05QDNP-X	SW05QDNP2-M	W05QDNP2-SXY	W05QDNP2-X
8 ft (2.44m)	SW08QDNP-M	SW08QDNP-SXY	SW08QDNP-X	SW08QDNP2-M	W08QDNP2-SXY	W08QDNP2-X
10 ft (3.05m)	SW10QDNP-M	SW10QDNP-SXY	SW10QDNP-X	SW10QDNP2-M	W10QDNP2-SXY	W10QDNP2-X
12 ft (3.66m)	SW12QDNP-M	SW12QDNP-SXY	SW12QDNP-X	SW12QDNP2-M	W12QDNP2-SXY	W12QDNP2-X

Custom Whip Solutions (Lengths, Whip Extensions, Mounting Options) also available upon request!

Recommended Whip Mounts

For Non-Powered, Quick Disconnect Whips

Heavy Duty Steel Hitch Mount



HMQDNP
Non-Powered, Quick Disconnect
Base with 7-Way Plug and
107db Backup Alarm

Quick Disconnect Whip Base



SWQDNP
Non-Powered, Stainless
Steel Quick Disconnect
Mount (optional)

Heavy Duty Spring Base Mounts



519.30BNP
Non-Powered
Zinc Plated

Heavy Duty Angle Bracket Mount



ABM
Permanent Mount
Zinc-Plated Bracket to
attach whips to
toolbox, rack or bed

For Additional Safety Flags
(Refer to Page 35)
For Mounting & Accessories
(Refer to Pages 36-39)




Heavy Duty Warning Whips: Quick Disconnect (Powered)



Non-Powered Whips Also Available!

SafetyWhips® Powered Quick Disconnect Whips provide extended visibility of your vehicle or equipment Day and Night and ensure success for quick and easy removal needs. These whips are constructed of safe & non-conductive Fiberglass with quick connection, easy removal, and convenient stow-a-way capabilities. Offered as Single Piece or Two-Piece Breakdown or even Split-Pole options with Heavy Duty Fiberglass Whip Extensions available for added length. Standard whip lengths available from 3ft (0.91m) up to 12ft (3.66m) with whip extensions from 1ft (.30m) to 6ft (1.83m). Customize your fleet!



SW05QD-X-SC4Cx
5ft (1.52m), 1/2" rod - Powered with Single Color SC4 Series LED Whip Light (Constant Mode) and 16" orange safety flag with yellow reflective "X"



SW08QD-SXY
8ft (2.44m), 1/2" rod - Powered with 1156 Type Socket and 11.5" orange safety flag with yellow reflective "X"



SW08QD2-SXY-SC3xx
Two-Piece Breakdown Whip 8ft (2.44m), 1/2" rod - Powered by RCA with Dual Color SC3 Series LED Whip Light and 16" orange safety flag with yellow reflective "X"




EXT-3QD
Heavy Duty Whip Extension 3ft (.91m), 1/2" non-tapered rod, Quick Disconnect Stainless Steel fittings at top and bottom

Part # Length

EXT-1QD	1ft (.30m)
EXT-2QD	2ft (.61m)
EXT-3QD	3ft (.91m)
EXT-4QD	4ft (1.22m)
EXT-6QD	6ft (1.83m)

Full Color LED Whip Lights!

Single Color Dual Color



SC4 SERIES (NEW)
Flashing or Non-Flashing Models Available!



SC3 SERIES
All-in-One, Flashing & Non-Flashing Programmable modes!



SCM "MEGA-LITE" SERIES
Mega Programmable, Flashing & Non-Flashing modes!

For all LED Whip Light options (Refer to Page 34)

Standard Whip Lengths	Single Piece, Quick Disconnect Whips			Two-Piece, Quick Disconnect Breakdown Whips		
	Part #	Part #	Part #	Part #	Part #	Part #
	with 11.5" Orange Mesh Flag	with 11.5" Yellow Reflective "X" Mesh Flag	with 16" Yellow Reflective "X" Mesh Flag	with 11.5" Orange Mesh Flag	with 11.5" Yellow Reflective "X" Mesh Flag	with 16" Yellow Reflective "X" Mesh Flag
5 ft (1.52m)	SW05QD-M	SW05QD-SXY	SW05QD-X	SW05QD2-M	W05QD2-SXY	W05QD2-X
8 ft (2.44m)	SW08QD-M	SW08QD-SXY	SW08QD-X	SW08QD2-M	W08QD2-SXY	W08QD2-X
10 ft (3.05m)	SW10QD-M	SW10QD-SXY	SW10QD-X	SW10QD2-M	W10QD2-SXY	W10QD2-X
12 ft (3.66m)	SW12QD-M	SW12QD-SXY	SW12QD-X	SW12QD2-M	W12QD2-SXY	W12QD2-X

Custom Whip Solutions (Lengths, Whip Extensions, Mounting Options) also available upon request!

Recommended Whip Mounts

For Powered, Quick Disconnect Whips

Heavy Duty Steel Hitch Mount




HMQDA
Powered, Quick Disconnect Base with 7-Way Plug and 107db Backup Alarm

Heavy Duty Spring Base Mounts



519.30B
Powered Zinc Plated

Quick Disconnect Bases



SWQD-PT
Powered w/Pigtail Quick Disconnect Steel Mount (optional)

SWQD-R
Powered Quick Disconnect Steel Mount with RCA Type power connector & Pigtail (optional)

Heavy Duty Angle Bracket Mount



ABM
Permanent Mount Zinc-Plated Bracket to attach whips to toolbox, rack or bed

STANDARD SAFETY FLAG OPTIONS



Heavy Duty Mesh, Fluorescent Safety Colors, UV Resistant, Anti-Microbial & Fray Resistant



FLAG16-O-XY
Orange with Yellow Reflective "X" 16"L x 16"H



FLAG16-Y-XW
Yellow with White Reflective "X" 16"L x 16"H

For Additional Safety Flags (Refer to Page 35)
For Mounting & Accessories (Refer to Pages 36-39)



Telescoping Warning Whips: Powered & Non-Powered



The Collapsible, Extendable & Heavy Duty "Adjustable" Whip!



SafetyWhips® Heavy Duty Telescoping Whips are extremely versatile and an excellent solution to maintain site safety during unforeseen circumstances when quick changes need to happen! Driver Industrial Safety™ succeeded with this Mine-tough™ whip solution with heavy focus on developing a heavy duty, highly visible, and very user-friendly product. With its "adjustable" capabilities these whips are especially advantageous for high traffic environments and quick change site management needs, which in turn maintains a safe site workflow. These whips are designed with durability and include (3) locking sections - (2) locks for quick and easy whip length adjustments and built with rigid wrapped Heavy Duty Fiberglass. 24 hour Vehicle & Equipment identification is key in our industry, which is why we constructed both Powered & Non-powered Telescoping Whips with collapsible lengths down to 79in (6.58ft/2m) and full extension up to 252in (21ft/6.40m). Outfit your fleet today with SafetyWhips® Telescoping Whips!

TW11D-X (shown on fleet of vehicles on site)
11ft (3.35m), SafetyWhips® Powered Heavy Duty Telescoping Whips with 16" Orange Safety Flag



FULLY EXTENDED!

Locking Section




FULLY COLLAPSED!

Lock



TW-FMT mounted in truck bed



1156 Type Light Socket



Powered External Waterproof Connector (Male pigtail)

TW11D-GXW
11ft (3.35m), Powered with (3) Locking Sections, and 16" green safety flag with white reflective "X"

TW11NP-X
11ft (3.35m), Non-Powered with (3) Locking Sections and 16" orange safety flag with yellow reflective "X"

Part # x = flag option	Collapsed Whip Length	Extended Whip Length
TW11D-x	79in (200.66cm)	11ft (3.35m)
TW13D-x	86in (218.44cm)	13ft (3.96m)
TW15D-x	93in (236.22cm)	15ft (4.57m)
TW21D-x	100in (254.00cm)	21ft (6.40m)
TW11NP-x	79in (200.66cm)	11ft (3.35m)
TW13NP-x	86in (218.44cm)	13ft (3.96m)
TW15NP-x	93in (236.22cm)	15ft (4.57m)

Powered & Non-Powered Options (NP = Non-powered)

Full Color LED Whip Lights!

Single Color Dual Color



SC4 SERIES (NEW)
Flashing or Non-Flashing Models Available!



SC3 SERIES
All-in-One, Flashing & Non-Flashing Programmable modes!



SCM "MEGA-LITE" SERIES
Mega Programmable, Flashing & Non-Flashing modes!

For all LED Whip Light options (Refer to Page 34)

STANDARD SAFETY FLAG OPTIONS



Heavy Duty Mesh, Fluorescent Safety Colors, UV Resistant, Anti-Microbial & Fray Resistant



FLAG16-Y-XW
Yellow with White Reflective "X"
16"L x 16"H

For Additional Safety Flags (Refer to Page 35)
For Mounting & Accessories (Refer to Pages 36-39)

Recommended Whip Mounts

Assorted Mounting Hardware options for Telescoping Whips - powered & nonpowered available!

External Waterproof Connector



TWPT
Standard Male Connector - 12" Pigtail, use pigtail if mounting it in a different manner

Telescoping Whip Flat Surface Mount



TW-FMT
Powered with Mounting Holes and Whip Locking Pin - includes TWPT (+/- power wire)

Side Mount for Telescoping Whips and Platform Mounts



UPMT
Side Mount to bolt to a toolbox or other sturdy parts of your vehicle - includes quick pin

Heavy Duty Steel Hitch Mount



HMTDA
Powered, Telescoping Whip Base with 7-Way Plug and 107db Backup Alarm (for Non-Powered use HMTNPA)




Super Duty "All Weather" Warning Whips




Fully Customizable Whip Assemblies, built to handle the most Extreme Weather Conditions!

SafetyWhips® Super Duty All Weather™ Whips are super-sealed and built for strength! These robust whips are no joke. They're extremely reliable with increased durability due to the addition of "locked-in" shielding components (top and bottom); sealing against harsh environments to ensure protection from moisture & corrosion. In addition, we offer complete whip assemblies and optional customization for any Super Duty All Weather™ whip to ensure your needs are met. Standard whip lengths offered from 1ft (.30m) to 12ft (3.66m) with various SafetyWhips® Accessory & Mounting options available!



1156 Type Light Socket
* Heat Shrink Sealing added after install of SafetyWhips® SC Series (SC4 or SC3) LED Whip Light

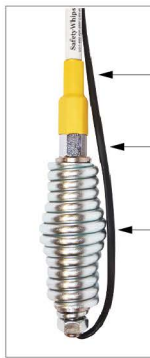

Heat Shrink Seal
Threaded Hex Whip Base
Super Duty Whip Base with Heavy Duty Powered Spring Mount (optional)

Also Available

With or without a Safety Flag, LED Whip Light, or Heavy Duty Spring!



1156 Type Light Socket




(x = LED color)

SD01-SC4Cx
Complete Whip Assembly:
1ft (.30m), 1/2" rod - Powered with Single Color SC4 Series LED Whip Light, Constant Mode
*No Flag or Spring Mount

SD02-M-SC3x
Complete Whip Assembly:
2ft (.61m), 1/2" rod - Powered with Single Color SC3 Series LED Whip Light and 11.5" orange safety flag.

Full Color LED Whip Lights!

Single Color Dual Color



SC4 SERIES (NEW)
Flashing or Non-Flashing Models Available!



SC3 SERIES
All-in-One, Flashing & Non-Flashing Programmable modes!



SCM "MEGA-LITE" SERIES
Mega Programmable, Flashing & Non-Flashing modes!

For all LED Whip Light options (Refer to Page 34)

STANDARD SAFETY FLAG OPTIONS



Heavy Duty Mesh, Fluorescent Safety Colors, UV Resistant, Anti-Microbial & Fray Resistant



FLAG16-O-XY
Orange with Yellow Reflective "X"
16"L x 16"H



FLAG16-G-XW
Green with White Reflective "X"
16"L x 16"H

For Additional Safety Flags (Refer to Page 35)
For Mounting & Accessories (Refer to Pages 36-39)

Product Part # Matrix	
Part #	SD 10 - X - 30B - SC3 x
Super Duty (Threaded Base only)	Whip Light: LED Color
Total Whip Length	A (Amber) AR (Amber/Red) R (Red) GW (Green/White) G (Green) B (Blue) W (White)
01 (1ft/.30m) 07 (7ft/2.13m)	LED Light: Head Type (leave blank for none)
02 (2ft/.61m) 08 (8ft/2.44m)	SC4C (SC4 series, Constant mode)
03 (3ft/.91m) 09 (9ft/2.74m)	SC4F (SC4 series, Flashing mode)
04 (4ft/1.22m) 10 (10ft/3.05m)	SC3 (SC3 series, Flashing & Non-Flashing)
05 (5ft/1.52m) 11 (11ft/3.35m)	Super Duty Spring Mount (leave blank for none)
06 (6ft/1.83m) 12 (12ft/3.66m)	30B (Super Duty Spring, Zinc Plated) Powered with 12" Flying Lead
Flag Option	
M (Small, 11.5" Orange Safety Flag)	
SX (Small, 11.5" Safety Flag with Reflective "X")	
X (Large, 16" Safety Flage with Reflective "X")	

Custom Whip Lengths & Assembly options available upon request!

Recommended Whip Mounts

For Powered, Threaded Mount Whips

Heavy Duty Spring Base Mounts



519.30B-SD
Zinc Plated

Whip Retaining Hook



RH01
Hold-down hook for use with 8ft (2.44m) or longer Super Duty Whips using a Heavy Duty Spring at the base for best results



Heavy Duty Angle Bracket Mount



ABM
Permanent Mount Zinc-Plated Bracket to attach whips to toolbox, rack or bed



Super Duty LED Warning Whips



The Toughest LED Whip Built To-Date!



Driver Industrial Safety™ exceeds all industry competition with our fully lit Super Duty LED Warning Whips! Without a doubt, our SafetyWhips® brand of warning whips stepped up with this innovative product solution. The Super Duty LED Whip is a “must have” when your vehicle or equipment is experiencing extremely harsh weather conditions and in need of a highly visible, extremely durable, reliable, and weather-resistant whip solution. Built with safe & non-conductive heavy duty fiberglass, these whips are Mine-tough™ and able to handle the worst of conditions. Engineered with advanced LED technology and constructed of a solid fiberglass internal pole with rugged polycarbonate external tubing for advanced protection against impact. SafetyWhips® Super Duty LED Whips allow other drivers to identify operating vehicles sooner, especially in low visibility environments. With standard whip lengths available from 4ft (1.22m) up to 12ft (3.66m), our customization options (custom sizes and LED colors) allow for more efficient workflow for your management team. Identify specific job functions, contractors and site personnel quickly. **Depend on Driver** to provide enhanced solutions for your site safety!

SDL04G-XY (shown with Green LEDs)

4ft (1.22m), SafetyWhips® Super Duty LED Whip with 16" Orange Safety Flag with Reflective "X"



Available With or Without a Safety Flag!



Protective Pressure Humidity Vent
To equalize pressures while blocking water & contaminants

SDL04x

4ft (1.22m) - Rod only Super Duty LED Whip
*No Flag included
(x = LED color)




Threaded Base
Optional Quick Disconnect conversion kit also available (kit sold separately)

SDL06R-XY

6ft (1.82m) - Red LEDs Super Duty LED Whip with 16" orange safety flag with yellow reflective "X"



10ft of protected LED lighting from top to bottom!

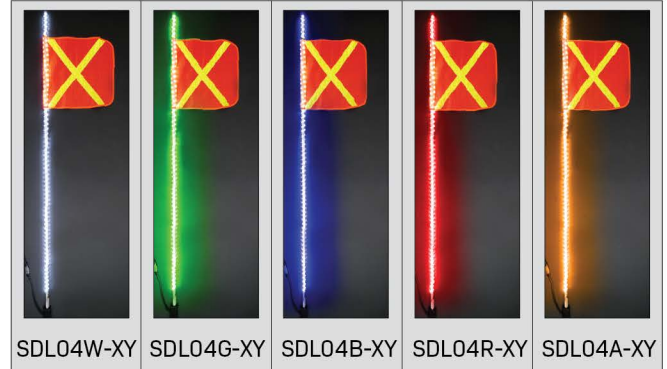

SDL04W-XY SDL04G-XY SDL04B-XY SDL04R-XY SDL04A-XY

Standard Whip Lengths	Super Duty LED Whip
	Part #
	with 16" Yellow Reflective "X" Orange Mesh Flag
4ft (1.22m)	SDL04x-XY
6ft (1.82m)	SDL06x-XY
8ft (2.44m)	SDL08x-XY
10ft (3.00m)*	SDL10x-XY
12ft (3.66m)*	SDL12x-XY

x = LED Color (A, R, G, B, or W)
*SDL-WSSM-KIT required

Available in 12Vdc and 24 Vdc!

*When installing, use a minimum of 16 gauge wire and an amp fuse.

STANDARD SAFETY FLAG OPTIONS



Heavy Duty Mesh, Fluorescent Safety Colors, UV Resistant, Anti-Microbial & Fray Resistant



FLAG11-O-XY

Orange with Yellow Reflective "X"
11.5"L x 11.5"H



FLAG11-R-XW

Red with White Reflective "X"
11.5"L x 11.5"H



FLAG16-O-XW

Orange with White Reflective "X"
16"L x 16"H

Recommended Whip Mounts

Whip Stabilizer Spring Mount (WSSM)



SDL-WSSM-KIT
Non-Powered, Stainless Steel Kit

Heavy Duty Steel Hitch Mount



HMSDA
Powered, Threaded Base Includes 7-Way Plug and 107db Backup Alarm

Whip Mount Adapter Kits



SWQD-KIT-NP
Non-Powered, Stainless Steel Quick Disconnect Kit

Heavy Duty Spring Base Mounts



519.30BNP
Non-Powered Zinc Plated

Heavy Duty Angle Bracket Mount



ABM
Permanent Mount Zinc-Plated Bracket to attach whips to toolbox, rack or bed

Assorted Mounting Hardware options for Super Duty LED Whips

For Additional Safety Flags (Refer to Page 35)
For Mounting & Accessories (Refer to Pages 36-39)



Super Duty LED Warning Whips



The Toughest LED Whip Built To-Date!

NEW!

Dual Color Super Duty LED Warning Whips

Driver Industrial Safety™ is thrilled to introduce our new Dual Color Super Duty LED Warning Whips, designed with two color visibility in response to customer feedback.

LED Color Combinations Available!



SDL04xx
4ft (1.22m)
Super Duty LED Whip
*No Flag included
(x = LED color)




Threaded Base
Optional Quick Disconnect conversion kit also available (kit sold separately)

External Waterproof Connector

Standard Whip Lengths	Super Duty LED Whip
	Part #
	with 16" Yellow Reflective "X" Orange Mesh Flag
4ft (1.22m)	SDL04xx-XY
6ft (1.82m)	SDL06xx-XY
8ft (2.44m)	SDL08xx-XY
10ft (3.00m)*	SDL10xx-XY
12ft (3.66m)*	SDL12xx-XY

xx = LED Color Combinations Available (A, R, G, B, or W)
*SDL-WSSM-KIT required

Available in 12Vdc and 24 Vdc!
*When installing, use a minimum of 16 gauge wire and an amp fuse.

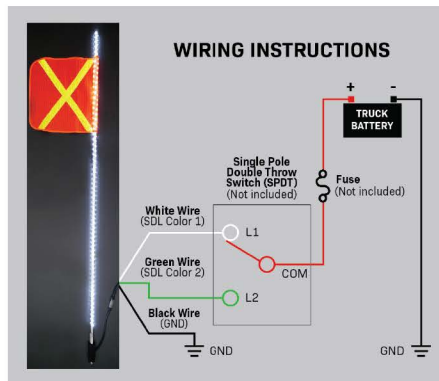

NEW!

12' Super Duty LED Warning Whips

Driver Industrial Safety™ is thrilled to introduce our new 12' Super Duty LED Warning Whip, designed for exceptional visibility in response to customer feedback. This innovative SafetyWhips® product is perfect for vehicles and equipment in harsh weather conditions, providing a highly visible, durable, and reliable solution. Also introducing our Whip Stabilizer Spring Mount (WSSM), required for stabilizing all 10' and 12' whips in windy conditions.



SDL12R-XY
12ft (3.66m) - Red LEDs
Super Duty LED Whip with 16" orange safety flag with yellow reflective "X"

12' (3.66 m)

Available in 12 Vdc and 24 Vdc!
*When installing, use a minimum of 16 gauge wire and an amp fuse.

SDL-WSSM-KIT
Whip Stabilizer Spring Mount (Required Mount)

STANDARD SAFETY FLAG OPTIONS



Heavy Duty Mesh, Fluorescent Safety Colors, UV Resistant, Anti-Microbial & Fray Resistant



FLAG11-O-XY
Orange with Yellow Reflective "X"
11.5"L x 11.5"H



FLAG16-O-XW
Orange with White Reflective "X"
16"L x 16"H

For Additional Safety Flags (Refer to Page 35)
For Mounting & Accessories (Refer to Pages 36-39)

Required WSSM Whip Mount

Required for All 10' and 12' Super Duty LED Whips!
(Recommended for 8' SDL Whips).

NEW! SDL-WSSM-KIT | Whip Stabilizer Spring Mount



ABM
Permanent Mount Zinc-Plated Bracket (Sold Separately)

519.30BNP
Heavy Duty Spring Base Mount, Non-Powered Zinc Plated



519.343NP
Threaded Whip Base Non-Powered, Steel Thread Mount

WSSM
Whip Stabilizer Spring Mount Stainless Steel



519.343NP
Threaded Whip Base, Non-Powered, Steel Thread Mount



519.30BNP
Heavy Duty Spring Base Mount, Non-Powered Zinc Plated



WSSM
Whip Stabilizer Spring Mount Stainless Steel




Heavy Duty LED Whip Lights: SC Series



High Quality, Premium LED Components ▪ Single & Dual Colors ▪ Compatible on Various Powered Warning Whips!

Colors Available A B W G R

SCM Series

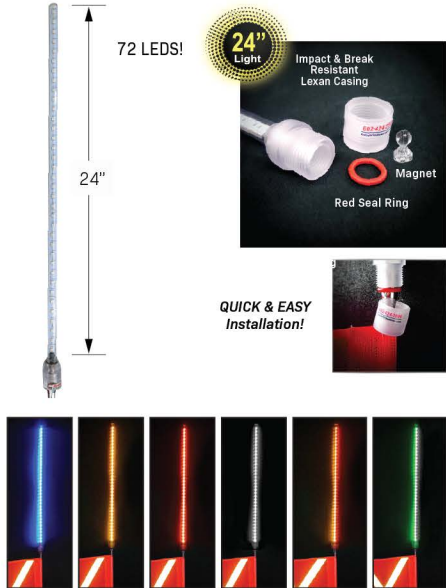

- ▶ **Bright LEDs** for Extended Vehicle/Equipment Visibility (72 LEDs).
- ▶ **360 Degree Visibility**
- ▶ **Impact and Break Resistant** - High profile Lexan casing
- ▶ **Programmable Light Sensor** for Night time Visibility
- ▶ **Multi-Voltage:** Safely from 10 to 40 Volt
- ▶ **Withstands Extreme Weather Conditions**
- ▶ **“Lock and Seal” System** - safely securing light to base and sealing against Corrosion, Moisture and Harsh Environments!
- ▶ **“Easy-to-Use” Magnet Operation for User-Friendly Programming** between flashing and non-flashing modes

SC4 Series



- ▶ **Bright LEDs** for Extended Vehicle/Equipment Visibility
- ▶ **360 Degree Light Diffusion** - Uniformed Brightness
- ▶ **Impact and Break Resistant** - High profile Lexan casing
- ▶ **Multi-Voltage:** Safely from 10 to 40 Volt
- ▶ **Withstands Extreme Weather Conditions**
- ▶ **“Lock and Seal” System** - safely securing light to base and sealing against Corrosion, Moisture and Harsh Environments
- ▶ **Constant and Non-Flashing** models available

SC3 Series



- ▶ High Performance, **Super Bright LEDs** for Hi-Visibility vehicle and equipment identification!
- ▶ Low Profile, Innovative Design with **360 degree Light Diffusion** - creates Uniformed Brightness
- ▶ **Programmable Light Sensor** for Night time Visibility
- ▶ Rugged **Impact and Break Resistant** structure for withstanding Extreme Environmental Conditions!
- ▶ **Multi-Voltage:** Safely from 10 to 40 Volt
- ▶ **“Lock and Seal” System** - safely securing light to base, sealing against Corrosion, Moisture and Harsh Environments!
- ▶ **“Easy-to-Use” Magnet Operation for User-Friendly Programming** between flashing and non-flashing modes
- ▶ **Multiple Safety Color Combinations** to help identify specific job functions, contractors & site personnel

Product Part # Matrix	
SCM - A	
LED Mega-Lite Series	LED Light Colors*
Programmable Flashing and Non-Flashing Modes	A (Amber)
	B (Blue)
	W (White)
	G (Green)
	R (Red)
	AR (Amber/Red)
	AW (Amber/White)
	GW (Green/White)
IP RATED IP66/IP67	
* Multiple color combinations available upon request	

100,000 Hour LED Life! (for 1156 Type Sockets)
 12 volts = .445 amps / 5.34 watts
 24 volts = .280 amps / 6.72 watts

Product Part # Matrix	
SC4 - C R	
LED Whip Light Series	LED Light Colors*
Flashing or Non-Flashing options	A (Amber)
	B (Blue)
	W (White)
	G (Green)
	R (Red)
	AR (Amber/Red)
	GW (Green/White)
	Light Modes
	F (Flashing)
	C (Constant)
IP RATED IP66/IP67	
* Multiple color combinations available upon request	

100,000 Hour LED Life! (for 1156 Type Sockets)
 12 volts = .075 amps / 0.9 watts
 24 volts = .045 amps / 1.08 watts

Product Part # Matrix	
SC3 - A	
LED Whip Light Series	LED Light Colors*
Both Flashing and Non-Flashing Programmable Mode Compatibility	A (Amber)
	B (Blue)
	W (White)
	G (Green)
	R (Red)
	AR (Amber/Red)
	AW (Amber/White)
	GW (Green/White)
IP RATED IP66/IP67	
* Multiple color combinations available upon request	

100,000 Hour LED Life! (for 1156 Type Sockets)
 12 volts = .125 amps / 1.5 watts
 24 volts = .073 amps / 1.752 watts

Heavy Duty Safety Flags



Hi-Visibility Fluorescent Safety Colors ■ 3M™ Reflective Striping ■ UV Resistant, Anti-Microbial & Fray Resistant!

Standard Flag Colors:

PMS Colors are based on the Pantone Matching System.




Multiple Color Combinations & Sizes Available for Purchase!

Custom Flag Sizes & Color Options also available upon request!


9" Mesh Safety Flags



FLAG-PO
Orange (PMS 171 C)
12"L x 9"H
(30.5cm x 22.8cm)



FLAG-PB
Blue (PMS 300 C)
12"L x 9"H
(30.5cm x 22.8cm)



FLAG-PO-SY
Orange (PMS 395 C) &
Yellow 3M Stripe
12"L x 9"H
(30.5cm x 22.8cm)



FLAG-PO-SW
Orange (PMS 395 C) &
White 3M Stripe
12"L x 9"H
(30.5cm x 22.8cm)

11.5" Mesh Safety Flags


Includes (2) Hog Rings



FLAG11-O
Orange (PMS 171 C)
11.5"L x 11.5"H (29cm x 29cm)



FLAG11-Y
Yellow (PMS 395 C)
11.5"L x 11.5"H (29cm x 29cm)



FLAG11-G
Green (PMS 2287 C)
11.5"L x 11.5"H (29cm x 29cm)

11.5" Mesh Safety Flags with 3M™ Reflective "X"

Includes (2) Hog Rings



FLAG11-O-XY
Orange (PMS 171 C)
with Yellow 3M Reflective "X"
11.5"L x 11.5"H (29cm x 29cm)



FLAG11-Y-XW
Yellow (PMS 395 C)
with White 3M Reflective "X"
11.5"L x 11.5"H (29cm x 29cm)



FLAG11-G-XW
Green (PMS 2287 C)
with White 3M Reflective "X"
11.5"L x 11.5"H (29cm x 29cm)

16" Mesh Safety Flags with 3M™ Reflective "X"


Includes (2) Hog Rings



FLAG16-O-XY
Orange (PMS 171 C)
with Yellow 3M Reflective "X"
16"L x 16"H (40.6cm x 40.6cm)



FLAG16-Y-XW
Yellow (PMS 395 C)
with White 3M Reflective "X"
16"L x 16"H (40.6cm x 40.6cm)



FLAG16-G-XW
Green (PMS 2287 C)
with White 3M Reflective "X"
16"L x 16"H (40.6cm x 40.6cm)

12" Metal Flags

NEW!

- ▶ Up to (3) 9"H Characters - Numbers / Letters
- ▶ Various Fluorescent Color Combinations Available:



9"H Characters with Fluorescent
3M™ Diamond Grade™ Reflective Backing

Double-sided with
9"H Characters

FLAG-AN
Metal Flag with Black Non-Reflective Vinyl
Numbers and Reflective Yellow Green Background
Flag Size: 12" x 12"
(Whip sold separately)



Nylon Streamer
FLAG-Streamer-O
Flourescent Orange Nylon
with (1) 5/8" end Grommet
18"L x 2"H (45.7cm x 5.1cm)



Light Duty Nylon Windssock
FLAG-WS8-19
Flourescent Orange with Grommets
Windssock Size: 19"L x 8"D (48.3cm x 20.3cm)
(All Hardware Sold Separately, Part #: FLAG-WS8-HW)

Other windssock sizes
and colors available



Heavy Duty Nylon Windssock
FLAG-WS18-96
Flourescent Orange with Grommets
Windssock Size: 96"L x 18"D (243.8cm x 45.7cm)
(All Hardware Sold Separately, Part #: FLAG-WS18-HW)



Airport Checkered Nylon Flag
FLAG-APF
Heavy Duty Airport Safety Flag
White & Orange Checkered
Flag Size: 36"L x 36"D (91.4cm x 91.4cm)

Heavy Duty Warning Whip Bases & Adapters

Powered & Non-Powered Options Available!



Whip Mount Bases

Threaded Hex Whip Receiving Mounts

(For use with Threaded Base Whips)



Steel Thread Mounts

- A 519.343NP**
Non-powered, Threaded Hex base
- B 519.343-RCA**
Powered, Threaded Hex Base with RCA Connection for quick power connection using included Hot Plug (Part#: HP.2, also sold separately)
- C 519.343**
Powered, Threaded Hex base with affixed Pig Tail single positive lead wire for power at the bottom for a solid hardwire connection

Heavy Duty Spring Mounts



Quick Disconnect Whip Receiving Mounts

(For use with Quick Disconnect Whips)



Stainless Steel Quick Disconnect Mounts

- D SWQDNP**
Non-powered, Quick Disconnect base
- E SWQD-PT**
Powered, Quick Disconnect base with affixed Pig Tail single positive lead wire for power at the bottom for a solid hardwire connection
- F SWQD-R**
Powered, Quick Disconnect base with RCA connection for quick power connection using included Hot Plug (Part#: HP.2, also sold separately)

Non-Powered Springs

- G 519.30BNP**
Non-Powered, .283 Zinc-Plated Barrel Spring Base (Added resistance to corrosion)

Powered Springs

- H 519.30B**
Powered, .283 Zinc-Plated Barrel Spring Base with RCA connection at bottom (Added resistance to corrosion)

Whip Mount Adapter Kits

Also Available - single adapters without a receiving mount

Quick & Easy Conversion of Your SafetyWhips® Threaded Mount Base to a Quick Disconnect!

(For use when converting 1/2" - 20 Thread whip connection to Quick Disconnect connection)




Non-Powered

- K SWQD-KIT-NP (Kit)**
Non-powered, Stainless Steel Quick Disconnect Kit that includes Whip Adapter & Quick Disconnect Receiving Mount
- L SWQD-WA-NP (Adapter Only)**
Non-Powered, Stainless Steel Quick Disconnect Whip Adapter. Adapter threads to the base of a threaded whip to convert the end to Quick Disconnect



Powered with Lead

- M SWQD-KIT-PT (Kit)**
Powered, Stainless Steel Quick Disconnect Kit that includes Whip Adapter & Quick Disconnect Receiving Mount with affixed Pig Tail single power lead
- N SWQD-WA (Adapter Only)**
Powered, Stainless Steel Quick Disconnect Whip Adapter. Adapter threads to the base of a threaded whip to convert the end to Quick Disconnect



Powered w/Detachable RCA Lead

- O SWQD-KIT-R (Kit)**
Powered, Stainless Steel Quick Disconnect Kit that includes Whip Adapter & Quick Disconnect Receiving Mount with RCA connection using included Hot Plug (HP.2)
- P SWQD-WA (Adapter Only)**
Powered, Stainless Steel Quick Disconnect Whip Adapter. Adapter threads to the base of a threaded whip to convert the end to Quick Disconnect.

Heavy Duty Warning Whip Mounts



Options for Powered & Non-Powered Warning Whips (Threaded or Quick Disconnect)

Permanent Mounts



Angle Bracket Mount



ABM
Heavy duty steel mount that works great with Powered and Non-Powered Whips, and whip Bases. Zinc-Plated for corrosion resistance.

Attach whips to toolbox, rack or truck bed!



Fold Down Mount with Side Mount Attachment



FDSM
Heavy duty aluminum mount with various mounting solutions. Easily adjusts for right or left side mounting and able to fold down when whip is not in use.

Universal Flat Surface Mount



FSM
Heavy duty steel mount - powder coated in black. Can be used with both Powered & Non-Powered Whips, Threaded or Quick Disconnect.



Stake Pocket Mount



SPM
Heavy duty aluminum mount. Universal Fit with Wedge Application for larger trucks and pickups with stake pockets. Perfect for leased vehicles.
No need to drill holes in vehicles for use!

Fold Down Van Mount



FDVM
Stainless steel mount with a locking spring pin. Versatile function locking whip in an up or down position.
Used on side of vehicles, metal boxes, cranes

NEW! Whip Stabilizer Spring Mount



ABM
Permanent Mount
Zinc-Plated Bracket
(Sold Separately)



519.343NP
Threaded Whip Base
Non-Powered, Steel
Thread Mount

519.30BNP
Heavy Duty Spring
Base Mount,
Non-Powered Zinc
Plated

WSSM
Whip Stabilizer
Spring Mount
Stainless Steel

SDL-WSSM-KIT

Super Duty LED Whip Stabilizer Spring Mounting Kit. Required Kit for 10', and 12' Super Duty LED whips (recommended for 8' Super Duty LED whips).

Temporary Mounts

* Includes (3) 150# Pull Cup Magnets and Lifting Handle
** Includes (3) 150# Pull Cup Magnets



Heavy Duty Magnet Mounts

Our SafetyWhips® Magnet Mounts are a heavy duty, non-destructive solution for temporary whip mounting. Reliable in avoiding any permanent physical damage to your vehicle or equipment especially great for leased equipment. All Magnet Mount options are built with (3) super duty Pull Cup Magnets for enhanced suction, handling maximum speeds up to 35mph / 56kph.

The **Quick Release** feature is the most popular option when ordering a Powered Magnet Mount!

519.33LHR shown with 3ft (.91m) Quick Disconnect Whip



519.320-V
Window Mount
with Vacuum Assist

Temporary heavy duty mounting solution with vacuum suction application for quick and easy install & removal of whip on vehicle. Includes Cigarette Cord for Powered Whips

Powered & Non-Powered Options Available!
--> For Whips up to 8ft (2.44m)

LWW-Mount

Light Duty Window Mount Bracket



Light Duty Whip mounting solution for temporary install & easy removal of whip on a vehicle. For use with Light Duty ATV308/ATV375 Whips up to 7ft (2.13m)

--> For Non-Powered Whips up to 8ft (2.44m)



519.33LHR*



519.33LRNP**



519.330
Super Heavy Duty Magnetic Mount
Heavy Duty Magnetic Whip Mount with (4) 150# pull cup magnets. Includes Cigarette Cord for Powered Whip usage.

Maximum Speeds up to 70mph!
--> For Whips up to 12ft (3.66m)



Powered & Non-Powered Options Available! --> For Whips up to 8ft (2.44m)

Heavy Duty Warning Whip Hitch Mounts



Powered & Non-Powered Options Available for Threaded, Quick Disconnect & Super Duty LED Whips!

Standard Hitch Mounts: Powered

* Hitch Mount options made for 2" (5.08cm) Receivers

We offer a variety of Heavy Duty Standard Hitch Mounting options to support all types of our SafetyWhips® Warning Whips. Securing your Whip Assembly properly to your vehicle or equipment is essential for jobsite safety. SafetyWhips® Standard Hitch Mount collection provides multiple heavy duty mounting systems - Screw Mount for standard Threaded Whips, Quick Release Mount for Quick Disconnect Whips, or Telescoping Adapter Mount for Telescoping and Breakdown Whips.

Replacement Accessories (Sold Separately)



HM-B/U Alarm 107dB
Backup Alarm, 12 to 24V

HM-Pin with Cotter Pin
Hitch Pin with Cotter Pin
5/8" x 3" (1.59cm x 7.62cm)

HM-Trailer Plug
Trailer End Plug with
7-Way Plastic Connector



HM1*
Threaded Base,
Includes 7-Way Plug
(Non-powered, Part #: HM1NP)



HM1A*
Threaded Base, Includes 7-Way Plug and
built-in 107db Backup Alarm
(Non-powered, Part #: HM1NPA)



HMQD*
Quick Connect Base,
Includes 7-Way Plug
(Non-powered, Part #: HMQDNP)



HMQDA*
Quick Connect Base, includes 7-Way Plug
and built-in 107db Backup Alarm
(Non-powered, Part #: HMQDNPA)



HMTD*
Telescoping Base, includes 7-Way Plug
Powered with Deutsch Connector.
(Non-powered, Part #: HMTNP)



HMTDA*
Telescoping Base, includes 7-Way Plug,
built-in 107db Backup Alarm. Powered with
Deutsch Connector.
(Non-powered, Part #: HMTNPA)

NON-POWERED, SUPER DUTY LED WHIP MOUNTS!



HMSDA* / HMSDQDA*
Threaded Base (left) / Quick Disconnect Base (right),
Includes 7-Way Plug and built-in 107db Backup Alarm.
Powered with Deutsch Connector.
(Without 107db Backup Alarm, Part #: HMSD / HMSDQD)

Extended Hitch Mounts: Powered

Driver and Passenger Side Options Available: For Passenger Side Mounts, add "- PASS" to Item Part#

Extended Side Application mounting options allow the use of your vehicle's hitch receiver for all types of SafetyWhips® Warning Whips. While still being able to utilize the tailgate or rear hatch when needed.

Available Options:

Screw Mount for standard Threaded Whips, Quick Release Mount for Quick Disconnect Whips, or Telescoping Adapter for Telescoping and Breakdown Whips.

* Extended hitch mount options made for 2" (5.08cm) receivers.




HML*
Threaded Base, Includes 7-Way Plug
(Non-powered, Part #: HMLNP)



HMLQD*
Quick Connect Base, Includes
7-Way Plug
(Non-powered, Part #: HMLQDNP)



HMLQDA*
Quick Connect Base, Includes 7-Way Plug
and built-in 107db Backup Alarm
(Non-powered, Part #: HMLQDNPA)

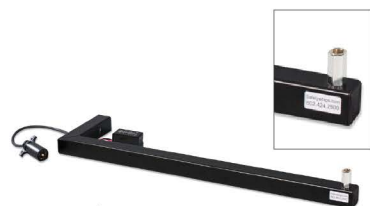

HMLA*
Threaded Base, Includes 7-Way Plug and
built-in 107db Backup Alarm
(Non-powered, Part #: HMLNPA)



HMLTD*
Telescoping Base, Includes
7-Way Plug. Powered with
Deutsch Connector
(Non-powered, Part #: HMLTNP)



HMLTDA*
Telescoping Base, Includes 7-Way Plug
and built-in 107db Backup Alarm.
Powered with Deutsch Connector
(Non-powered, Part #: HMLTNP)

Extended Hitch Mounts
Also Available for
Super Duty LED Whips!
(Part #: HMLSD & HMLSDA)

Additional Accessories / Personal & Traffic Safety



High Quality Electrical Plugs & Connectors ■ Personal Safety Kits ■ Heavy Duty Traffic Safety Accessories

Whip Accessories & Replacement Parts

* Female Connector also available - Part #: TWPT-F

Electrical Plugs & Connectors



RCA.1
RCA Extension Phone Plug with Right Angle Connection and 2-Wire Extension for power connection.



RCA.2
RCA Extension Phone Plug with Straight Plug Connection and 2-Wire Extension for power connection.



HP.2
Hot Plug with wire used to connect positive power. Used with whips that pick up ground through base attachment.



TWPT*
Standard, Dual-Wire Male Deutsch Connector with 12" (30.48cm) Pigtail used on all SafetyWhips® Telescoping Whips. Provides extra protection in Harsh Environments.



519.821
Cigarette Cord Adapter w/ Right Angle RCA Plug.



519.821-DC
Cigarette Cord Adapter with male Deutsch Connector.

Replacement Parts



HM-Pin with Cotter Pin
5/8" x 3" Hitch Mount Pin with Cotter Pin. Fits all Hitch Mounts.



RH01
Whip Retaining Hook recommended for use with 8ft (2.44m) Heavy or Super Duty Whips



HM-B/U Alarm 107db
Backup Alarm, 12 to 24V



HM-Trailer Plug
Trailer End plug with 7-Way plastic connector

First Aid Clean-up Kits & Fire Extinguishers

Easily Stowable & Wall-Mountable!

Products not available in Canada



FA-10P

10 Person First Aid Kit (Plastic Case)

Includes:
Plastic Adhesive Strips, Bandages, Gauze Pads, Gauze Bandage, Adhesive Tape, Antiseptic Towelettes, Aid/Burn Cream Packets, Bandage Scissors, Forceps, Gloves, First Aid Guide



FA-25P

25 Person First Aid Kit (Hard Metal Case)

Includes:
Cold-pak, Plastic Adhesive Strips, Bandages, Gauze Pads, Gauze Bandage, Adhesive Tape, Antiseptic Towelettes, Aid/Burn Cream Packets, Gloves, Medical Scissors, Tweezers, First Aid Guide



FE-ABC-10T-C
10lb (4.5kg)
Tall Profile
ABC Rating
Aluminum Valve
Bracket sold separately



FE-VB-10-HD-T
Heavy Duty Bracket for 10lb (4.5kg) TALL Profile Fire Extinguisher. Easy to install and store extinguisher!

High Quality Monoammonium Phosphate Fire Extinguishers specifically designed for use in combating Class "A", "B", and "C" type fires. Top-grade extinguishers providing the widest range of extinguisher protection coverage!

Manufactured to ANSI/UL 299 and ANSI/UL 711 standards. US Coast Guard approved for Type B:C Size I. (Valid only with bracket)

ALSO AVAILABLE!
25 Person First Aid Kits - w/Eye Wash Solution (Part#: FA-25P-EW)
First Aid Kit - 400 Large Industrial w/Liner (Part#: FA-400LG)

Industrial Traffic Safety



3M™ Diamond Grade™ Conspicuity

Premium-Grade, High Visibility Reflective engineered with reflective microprismatic lens sheeting and pressure-sensitive adhesive. Effectively used for application to sides and rear of large trucks, trailers and other vehicles. The 983 Series of 3M™ Conspicuity is most durable, providing maximum visibility at multiple angles in for all weather conditions!

Other Color Options Also Available!

TAPE-2-R/W

2" W (2.54cm) material - SOLD BY THE FOOT
Red & White alternating pattern
Red - 6" L (15.24cm) / White - 6" L (15.24cm)



Road Hazard Kit

A premium Roadside Emergency Safety Kit ensuring high visibility alerting in unexpected emergency situations on the road. Quickly alert all motorists to roadside trouble day or night with this Easy-to-Use setup and quick breakdown design. Heavy duty protective storage case also included. Ideal for roadside breakdowns or other emergencies.

Road Flares & Safety Triangle Kits Also Sold Separately!

Includes:
(1) Highway Safety Triangle Kit (13lbs/6.9kg)
(4) Road Flares (Red flame with 20 minute burn)

SAFETY IS ALL WE DO™



a Subsidiary of Driver Industrial Safety™

Where You Can Find Us

USA LOCATION - ARIZONA

2115 W. Mountain View Rd.
Phoenix, AZ 85021, USA

Phone: 602.424.2500
Fax: 602.424.9777

Sales@DriverIndustrial.com

USA LOCATION - COLORADO

10220 Brighton Rd., Suite 7
Henderson, CO 80640

Phone: 602.424.2500
Fax: 602.424.9777

Sales@DriverIndustrial.com

CANADA LOCATION

107-30791 Simpson Road
Abbotsford, BC V2T 6X4, Canada

Phone: 604.560.5080
Fax: 604.560.5090

SalesCanada@DriverIndustrial.com



www.DriverIndustrialSafety.com